

(19) World Intellectual Property
Organization
International Bureau



05 OCT 2004



(43) International Publication Date
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number
WO 2004/008175 A1

(51) International Patent Classification⁷: **G01S 17/36**,
7/493

(21) International Application Number:
PCT/JP2003/008934

(22) International Filing Date: 14 July 2003 (14.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2002-205165 15 July 2002 (15.07.2002) JP
2003-155712 30 May 2003 (30.05.2003) JP

(71) Applicant (for all designated States except US): **MAT-SUSHITA ELECTRIC WORKS, LTD.** [JP/JP]; 1048, Oaza-Kadoma, Kadoma-shi, Osaka 571-8686 (JP).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **HASHIMOTO, Yusuke** [JP/JP]; c/o Matsushita Electric Works, Ltd., 1048, Oaza-Kadoma, Kadoma-shi, Osaka 571-8686 (JP).
TAKADA, Yuji [JP/JP]; c/o Matsushita Electric Works,

Ltd., 1048, Oaza-Kadoma, Kadoma-shi, Osaka 571-8686 (JP). **KURIHARA, Fumikazu** [JP/JP]; c/o Matsushita Electric Works, Ltd., 1048, Oaza-Kadoma, Kadoma-shi, Osaka 571-8686 (JP). **FURUKAWA, Satoshi** [JP/JP]; c/o Matsushita Electric Works, Ltd., 1048, Oaza-Kadoma, Kadoma-shi, Osaka 571-8686 (JP). **IKARI, Motoo** [JP/JP]; c/o Matsushita Electric Works, Ltd., 1048, Oaza-Kadoma, Kadoma-shi, Osaka 571-8686 (JP).


(74) Agents: **NISHIKAWA, Yoshiaki** et al.; Hokuto Patent Attorneys Office, Umeda-Daiichiseimei Bldg. 5F, 12-17, Umeda 1-chome, Kita-ku, Osaka-shi, Osaka 530-0001 (JP).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: LIGHT RECEIVING DEVICE WITH CONTROLLABLE SENSITIVITY AND SPATIAL INFORMATION DETECTING APPARATUS USING THE SAME

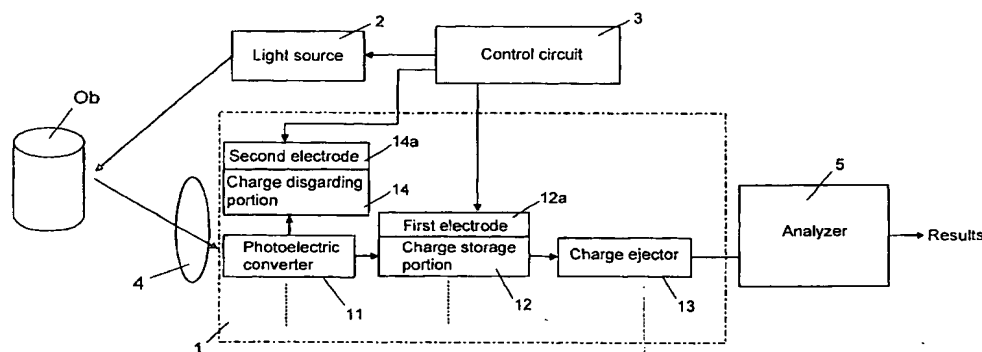

(57) Abstract: A spatial information detecting apparatus using an intensity-modulated light has a photoelectric converter for receiving a light provided from a space, into which a light intensity-modulated by a predetermined modulation signal is being irradiated, and generating amounts of electric charges corresponding to an intensity of received light; charge discarding portion having an electrode for removing dispensable charges from the electric charges generated by the photoelectric converter according to a voltage applied to the electrode; charge storage portion for storing signal charges from the electric charges generated by the photoelectric converter; control circuit for controlling the voltage applied to the electrode at a timing synchronized with a period of the modulation signal to change a ratio of the signal charges stored in the charge storage portion to the electric charges generated by the photoelectric converter; charge ejector for outputting the signal charges from the charge storage portion; and an analyzer for determining spatial information from an output of the charge ejector. According to this apparatus, since the dispensable charges are previously removed from the electric charges generated by the photoelectric converter by the charge discarding portion, it is possible to improve S/N ratio and accurately determine the spatial information.

BEST AVAILABLE COPY

WO 2004/008175 A1



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DESCRIPTION

LIGHT RECEIVING DEVICE WITH CONTROLLABLE SENSITIVITY AND
SPATIAL INFORMATION DETECTING APPARATUS USING THE SAME

5 TECHNICAL FIELD

The present invention relates to a light receiving device using a new sensitivity control method and a spatial information detecting apparatus according to the technical concept of the same light receiving device.

10 BACKGROUND ART

In the past, a technique of detecting spatial information by use of an intensity-modulated light has been utilized. That is, the intensity-modulated light is irradiated from a light source into a space, and a light reflected from an object in the space is received by a photoelectric converter. The spatial information can
15 be determined from a relationship between the intensity-modulated light and the received light. In the present description, the spatial information includes a distance from the object, a change in light receiving amount caused by reflections on the object, and so on. For example, the distance information can be determined from a phase difference between the intensity-modulated light and the
20 received light. In general, this technique is called as "Time-of-Flight (TOF)" method.

For example, US patent No. 5,856,667 discloses a distance measuring apparatus using the TOF method. In this apparatus, a light emitted from a light source is intensity-modulated by a sine wave having a required modulation
25 frequency (i.e., emission frequency), and a light sensitive part detects an intensity of received light plural times within a time period shorter than a modulation period that is a reciprocal of the modulation frequency. When detecting the intensity of received light is repeated 4 times within one modulation period, the phase difference is determined from the detected four intensities of received light. For

example, when intensity-modulating the light irradiated from the light source to an object by a radio frequency wave of 20 MHz, a wavelength of the intensity-modulated light is 15 m. Therefore, when the intensity-modulated light goes to the object spaced from the apparatus by a distance of 7.5 m and back, a phase delay corresponding to one modulation period occurs.

When the light emitted from the light source is intensity-modulated, as shown by the curve "W" of FIG. 30, and the modulated light reflected from an object is received by the light sensitive part, the intensity of received light changes, for example, as shown by the curve "R" of FIG. 30. In this case, four intensities (A0, A1, A2, A3) of received light can be detected at 4 different phases (0°, 90°, 180°, 270°). However, in the present circumstances, it is impossible to detect the intensity of light received at just the moment of each of the phases (0°, 90°, 180°, 270°). In the fact, each of the intensities of received light corresponds to the intensity of light received within a time width (Tw), as shown in FIG. 30.

On the assumption that the phase difference " ψ " does not change within the time period of sampling the intensity (A0, A1, A2, A3) of received light, and there is no change in light extinction ratio between the emitted light and the received light, a relationship between the intensity (A0, A1, A2, A3) of received light and the phase difference " ψ " can be represented by the following equation:

$$\psi = \tan^{-1} \{ (A3 - A1) / (A0 - A2) \} .$$

By use of the thus obtained phase difference " ψ " [rad], the modulation period "T" [s], and the speed of light "c" [m/s], a distance "L" [m] between the object and the apparatus can be calculated by the following equation:

$$L \doteq c T (\psi / 4 \pi) .$$

To achieve the technical concept described above, this US patent proposes to use an image sensor shown in FIG. 31, which comprises four memory cells (M0, M1, M2, M3) provided every light sensitive part (PD), and an electrical switch (S0, S1, S2, S3) disposed between each of the memory cells and the light sensitive part. The electrical switches (S0, S1, S2, S3) are respectively turned

on within the short time width (T_w), as shown in FIG. 30, to store the intensities (A_0, A_1, A_2, A_3) of received light in the memory cells (M_0, M_1, M_2, M_3). By repeating this procedure with respect to a plurality of periods, it is possible to reduce influences of dark current noises, shot noises (i.e., noises caused by variations in the occurrence of electron-hole pairs), static noises of an amplifier circuit, and so on, and improve S/N ratio. In the present specification, the operation described above is called as "synchronized integration".

However, when electric charges are generated by the light sensitive part, parts of them may remain in the light sensitive part for a moment without being transferred to the memory cell through the electric switch. Such residual electric charges disappear by recombinations in the light sensitive part. Alternatively, when another electrical switch is turned on within the time width (T_w), the residual electric charges may be accidentally transferred to another memory cell through to the electric switch.

For example, when the modulation frequency is 20 MHz, it is needed that the time width (T_w) is shorter than the modulation period of 50 ns. On the other hand, time required for allowing the residual electric charges to disappear by the recombinations is usually longer than 100 μ s. Therefore there is a possibility that the residual electric charges are accidentally transferred to another memory cell. This means that the residual electric charges are mixed as noise components in signal charges to be stored in the memory cell. As a result, when determining the phase difference " ψ " according to the above-described operation, there is a problem of lowering the accuracy of detecting the distance information. In addition, when using the image sensor with a large number of electrical switches, as shown in FIG. 31, there is another problem deteriorating cost/performance of the distance measuring apparatus.

SUMMARY OF THE INVENTION

Therefore, a primary concern of the present invention is to provide a spatial

information detecting apparatus using an intensity-modulated light, which has the capability of preventing dispensable electric charges being mixed as noise components in signal charges used to determine the spatial information, and improving S/N ratio.

5 That is, the spatial information detecting apparatus of the present invention comprises:

at least one photoelectric converter for receiving a light provided from a space,
into which the light intensity-modulated by a predetermined modulation
signal is being irradiated, and generating amounts of electric charges
10 corresponding to an intensity of received light;

a charge discarding portion having a first electrode for removing dispensable
charges from the electric charges generated by the photoelectric
converter according to a voltage applied to the first electrode;

15 a charge storage portion for storing signal charges from the electric charges
generated by the photoelectric converter;

a control circuit for controlling the voltage applied to the first electrode at a timing
synchronized with a period of the modulation signal to change a ratio of
the signal charges stored in the charge storage portion to the electric
charges generated by the photoelectric converter;

20 a charge ejector for outputting the signal charges from the charge storage portion;
and

an analyzer for determining spatial information from an output of the charge
ejector.

25 According to the present invention, since the voltage applied to the first
electrode of the charge discarding portion is controlled at the timing synchronized
with the period of the modulation signal, there is an advantage that residual
electric charges, which are not used as the signal charges, i.e., parts of the
electric charge generated by the photoelectric converter can be surely removed
as the dispensable charges before they are transferred to the charge storage

portion, and as a result the S/N ratio is remarkably improved. In addition, since the signal charges can be transferred the charge storage portion without the lapse of time needed for allowing the residual electric charges to disappear by recombinations in the photoelectric converter, it is possible to efficiently determine the spatial information with high accuracy.

In the present invention, it is preferred that the charge storage portion has a second electrode, and the control circuit controls a voltage applied to the second electrode constant to transfer required amounts of the electric charges generated by the photoelectric converter to the charge storage portion. Moreover, it is preferred that the control circuit controls the voltages applied to the first and second electrodes so as to alternately switch between a stage of transferring the electric charges generated by the photoelectric converter to the charge storage portion and a stage of transferring the electric charges generated by the photoelectric converter to the charge discarding portion.

In addition, it is preferred that the analyzer determines distance information from the signal charges stored with respect to different phases in a period of the modulation signal, and the spatial information detecting apparatus further comprises a phase switch for changing the phase of the modulation signal, at which the voltage is applied to the first electrode, every time that storing the signal charges in the charge storage portion at the phase is finished. It is further preferred that the charge storage portion has a light shielding film on the first electrode formed in the vicinity of a region of storing the signal charges.

A further concern of the present invention is to provide another spatial information detecting apparatus using an intensity-modulated light, which has the capability of achieving the above-described advantages.

That is, the spatial information detecting apparatus of the present invention comprises:

at least one photoelectric converter for receiving a light provided from a space, into which a light intensity-modulated by a predetermined modulation

signal is being irradiated, and generating amounts of electric charges corresponding to an intensity of received light;

a charge discarding portion having a first electrode for removing dispensable charges from the electric charges generated by the photoelectric converter according to a voltage applied to the first electrode;

a charge storage portion having a second electrode for storing signal charges from the electric charges generated by the photoelectric converter according to a voltage applied to the second electrode;

a control circuit for controlling the voltage applied to the second electrode at a timing synchronized with a period of the modulation signal, while applying a constant voltage to the first electrode, to change a ratio of the signal charges stored in the charge storage portion to the electric charges generated by the photoelectric converter;

a charge ejector for outputting the signal charges from the charge storage portion; and

an analyzer for determining spatial information from an output of the charge ejector.

According to the present invention, the ratio of the signal charges to be stored in the charge storage portion to the electric charges generated by the photoelectric converter can be changed by controlling the voltage applied to the second electrode at the timing synchronized with the period of the modulation signal, and parts (i.e., residual electric charges) of the electric charges generated by the photoelectric converter are always discarded as the dispensable charges by applying the constant voltage to the first electrode. That is, it is possible to control amounts of the signal charges to be transferred to the charge storage portion from the electric charges generated by the photoelectric converter, while removing the dispensable charges from the electric charges generated by the photoelectric converter. Therefore, there is an advantage of more efficiently determining the spatial information without deteriorating the detection accuracy.

As a further preferred embodiment of the present invention, the spatial information detecting apparatus comprises a plurality of photoelectric converters, and a set of photoelectric converters is selected from the plurality of photoelectric converters to define one pixel. The control circuit allows the charge storage
5 portion to store the signal charges from the electric charges generated by each of the photoelectric converters of the set at a timing of each of different phases in synchronization with the period of the modulation signal. The charge ejector simultaneously outputs the signal charges stored with respect to the different phases.

10 Another concern of the present invention is to provide a spatial information detecting method using a conventional CCD image sensor having an overflow drain electrode, which is characterized by controlling a control voltage applied to the overflow electrode in synchronization with the period of the modulation signal to achieve a substantially same operation as the synchronized integration.

15 That is, the spatial information detecting method comprises the steps of: allowing the CCD image sensor to receive a light provided from a space, into which a light intensity-modulated by a predetermined modulation signal is being irradiated;
storing signal charges by repeating a charge extraction operation plural times with
20 respect to each of different phases in a period of the modulation signal; and determining spatial information from the signal charges stored with respect to the different phases of the modulation signal,

wherein the charge extraction operation includes the steps of removing dispensable charges from electric charges generated by photoelectric converters
25 of the CCD image sensor according to a control voltage applied to the overflow electrode in synchronization with the period of the modulation signal, and storing the balance of the electric charges as the signal charges in a charge storage area of the CCD image sensor.

According to the above method of the present invention, even when the

conventional CCD image sensor is used to detect the spatial information, it is possible to improve S/N ratio and efficiently obtain the spatial information with high accuracy by controlling the control voltage applied to the overflow electrode in synchronization with the period of the modulation signal in place of using a large number of electrical switches.

In the detecting method described above, it is preferred that the CCD image sensor has at least three photoelectric converters, and the charge extraction operation includes the step of applying the control voltage to the overflow drain electrode in synchronization with the period of the modulation signal such that the electric charges generated by a predetermined one(s) of the at least three photoelectric converters are stored as the signal charges in the charge storage area, and the electric charges generated by the remaining photoelectric converter(s) are discarded as the dispensable charges. It is also preferred that the control voltage is applied to the overflow drain electrode to generate a potential barrier for electrically isolating the predetermined photoelectric converter(s) from the remaining photoelectric converter(s).

Still another concern of the present invention is to provide a light receiving device with controllable sensitivity, which is particularly useful for the spatial information detecting apparatus described above.

That is, the light receiving device of the present invention comprises:
at least one photoelectric converter for receiving a light provided from a space, into which a light intensity-modulated by a predetermined modulation signal is being irradiated, and generating amounts of electric charges corresponding to an intensity of received light;
a charge discarding portion having an electrode for removing dispensable charges from the electric charges generated by the photoelectric converter according to a voltage applied to the electrode;
a charge storage portion for storing signal charges from the electric charges generated by the photoelectric converter;

a sensitivity controller for controlling the voltage applied to the electrode at a timing synchronized with a period of the modulation signal to change a ratio of the signal charges stored in the charge storage portion to the electric charges generated by the photoelectric converter; and

5 a charge ejector for outputting the signal charges from the charge storage portion.

These and still other objects and advantages of the present invention will become more apparent from the best mode for carrying out the invention explained below, referring to the attached drawings.

10 BRIEF EXPLANATION OF THE DRAWINGS

FIG. 1 is a block diagram of a distance measuring apparatus of the present invention;

FIGS. 2A to 2D are explanatory diagrams illustrating the principle of operation of the distance measuring apparatus according to a first embodiment of the present
15 invention;

FIGS. 3A to 3D are explanatory diagrams illustrating the principle of operation of the distance measuring apparatus according to a second embodiment of the present invention;

FIGS. 4A to 4D are explanatory diagrams illustrating the principle of operation of
20 the distance measuring apparatus according to a third embodiment of the present invention;

FIG. 5 is a plan view of an image sensor of a distance measuring apparatus according to a fourth embodiment of the invention;

FIG. 6 is an exploded perspective view of a relevant portion of the image sensor.

25 FIG. 7 is a cross-sectional view cut along the line A-A of FIG. 6 or 11;

FIG. 8 is a potential diagram illustrating an operation of the distance measuring apparatus;

FIGS. 9A to 9C are potential diagrams illustrating another operations of the distance measuring apparatus;

FIG. 10 is a plan view of an image sensor of a distance measuring apparatus according to a fifth embodiment of the invention;

FIG. 11 is an exploded perspective view of a relevant portion of the image sensor.

FIG. 12 is a potential diagram illustrating an operation of the distance measuring
5 apparatus;

FIGS. 13A to 13C are potential diagrams illustrating another operations of the distance measuring apparatus;

FIG. 14 is a plan view of an image sensor of a distance measuring apparatus according to a sixth embodiment of the invention;

10 FIG. 15 is a perspective view of a relevant portion of the image sensor.

FIG. 16 is a potential diagram illustrating an operation of the distance measuring apparatus;

FIG. 17 is potential diagram illustrating another operation of the distance measuring apparatus;

15 FIGS. 18A to 18C are potential diagrams illustrating still another operations of the distance measuring apparatus;

FIG. 19 is a plan view of an image sensor of a distance measuring apparatus according to a seventh embodiment;

FIG. 20 is a perspective view of a relevant portion of the image sensor.

20 FIG. 21 is a potential diagram illustrating an operation of the distance measuring apparatus;

FIGS. 22A to 22C are potential diagrams illustrating another operations of the distance measuring apparatus;

25 FIGS. 23A and 23B are potential diagrams illustrating operations of a distance measuring apparatus according to an eighth embodiment of the invention;

FIGS. 24A and 24B are potential diagrams illustrating operations of a distance measuring apparatus according to a ninth embodiment of the invention;

FIGS. 25A and 25B are explanatory diagrams 3-dimensionally illustrating electron potentials generated under gate electrodes within a charge storing stage and a

charge discarding stage, respectively;

FIGS. 26A and 26B are potential diagrams illustrating operations of a distance measuring apparatus according to a tenth embodiment of the invention;

FIG. 27 is a perspective view of a distance measuring apparatus according to an
5 eleventh embodiment of the invention;

FIG. 28 is a plan view of an image sensor of a distance measuring apparatus according to a twelfth embodiment of the invention;

FIG. 29 is a plan view of an image sensor of the distance measuring apparatus according to a thirteenth embodiment of the invention;

10 FIG. 30 is an explanatory diagram illustrating the principle of operation of a conventional distance measuring apparatus; and

FIG. 31 is a plan view of an image sensor used in the conventional distance measuring apparatus.

15 BEST MODE FOR CARRYING OUT THE INVENTION

As an example of a spatial information detecting apparatus of the present invention, preferred embodiments of a distance measuring apparatus for determining distance information from a phase difference between an intensity-modulated light irradiated to an object and a light received by photoelectric
20 converter are explained in detail below. However, needless to say, the present invention is not limited to those embodiments. It should be interpreted that the technical idea of the present invention is available to any apparatus or devices using the phase difference.

<First Embodiment>

25 As shown in FIG. 1, the distance measuring apparatus of the present embodiment has a light source 2 for emitting a light into a required space. The light emitted from the light source 2 is intensity-modulated at a predetermined modulation frequency by a control circuit 3. As the light source 2, for example, it is possible to use an array of light emitting diodes (LED) or a combination of

semiconductor laser and divergent lens. As an example, the control circuit 3 intensity-modulates the light emitted from the light source 2 by a sine wave of 20 MHz.

5 In addition, the distance measuring apparatus has a plurality of photoelectric converters 11 for receiving a light provided from the space through an optical system such as lens 4. Each of the photoelectric converters 11 generates amounts of electric charges corresponding to an intensity of received light. For example, a photodiode can be used as the photoelectric converter 11. As a structure of the photodiode, there are "p-n" junction structure, "pin" structure and
10 "MIS" structure. In this embodiment, a matrix array of 100 x 100 photoelectric converters 11 is used as an image sensor 1.

3-dimensional information of the space, into which the light of the light source 2 is being irradiated, is mapped on a 2-dimensional planar surface that is a light receiving surface of the image sensor 1 through the lens 4. For example,
15 when an object "Ob" exists in the space, a light reflected from each point of the object is received by a photoelectric converter. By detecting a phase difference between the light emitted from the light source 2 and the light received by the photoelectric converter 11, a distance between the apparatus and each point of the object can be determined.

20 In addition to the photoelectric converter 11, the image sensor 1 has a charge storage portion 12 for storing parts of electric charges generated by the photoelectric converter 11 as signal charges used to determine the phase difference, charge discarding portion 14 for removing dispensable charges that are not used as the signal charges from the electric charges generated by the
25 photoelectric converter, and a charge ejector 13 for outputting the signal charges from the charge storage portion 12 to the outside of the image sensor 1. The charge storage portion 12 has a first electrode 12a. Amounts of electric charges transferred from the photoelectric converter 11 to the charge storage portion 12 can be changed by controlling a voltage applied to the first electrode 12a. In

addition, the charge discarding portion **14** has a second electrode **14a**. Amounts of electric charges transferred from the photoelectric converter **11** to the charge discarding portion **14** can be changed by controlling a voltage applied to the second electrode **14a**.

5 The charge storage portion **12** is provided every photoelectric converter **11**. Therefore, the number of the charge storage charge portions **12** is equal to the number of the photoelectric converters **11**. On the other hand, the charge discarding portion **14** may be provided every set of a plurality of photoelectric converters **11**. In this embodiment, a single charge discarding portion **14** is
10 formed for all of the photoelectric converters **11** of the image sensor **1**. The signal charges output from the charge ejector **13** are sent to an analyzer **5**. In the analyzer **5**, the phase difference between the light irradiated from the light source **2** and the light received by the photoelectric converter **11** is determined, and a distance between the apparatus and the object can be determined
15 according to the phase difference.

As explained above, to determine the distance from the object "**Ob**", it is required to detect the intensity (A_0 , A_1 , A_2 , A_3) of received light at the timing synchronized with a period of the modulation signal. Electric charges generated by the photoelectric converter **11** within a constant time width " T_w " (FIG. 30) at a
20 specific phase (e.g., 0° , 90° , 180° , 270°) of the modulation signal are stored as the signal charges in the charge storage portion **12**. Therefore, it is preferred to increase amounts of electric charges generated within the time width " T_w ", and on the contrary decrease the amounts of electric charges generated in the remaining time periods other than the time width (T_w), and ideally reduce the
25 amounts of electric charges generated in the remaining time periods to zero. Since the amounts of electric charges generated by the photoelectric converter **11** changes in accordance with an amount of light incident on the photoelectric converter **11**, it is required to control sensitivity of the image sensor **1** to obtain increased amounts of signal charges.

To control the sensitivity of the image sensor **1**, it can be proposed to control a magnitude of the voltage applied to the first electrode **12a** of the charge storage portion **12** at an adequate timing. However, since parts of the electric charges generated by the photoelectric converter **11**, i.e., residual electric charges that are not used as the signal charges, may be mixed as noise components in the signal charges, it is not sufficient to control the magnitude of the voltage applied to the first electrode.

In the present embodiment, required amounts of electric charges generated by each of the photoelectric converters **11** are always supplied to the corresponding charge storage portion **12** by keeping the magnitude of the voltage applied to the first electrode **12a** constant. On the other hand, a required voltage is applied to the second electrode **14a** of the charge discarding portion **14** except for a signal charge generation period, in which the electric charges used as the signal charges are generated by the photoelectric converter **11**, so that the electric charges generated in the time period other than the signal charge generation period by the photoelectric converter **11** are sent as dispensable charges to the charge discarding portion **14**. In short, the sensitivity of the image sensor **1** can be controlled by changing the voltage applied to the second electrode **14a** at the timing synchronized with the period of the modulation signal.

The basic concept of the present invention is explained in more detail referring to FIGS. 2A to 2D. In this explanation, the light irradiated from the light source **2** to the space is intensity-modulated by a modulation signal shown in FIG. 2A. For example, electric charges corresponding to an intensity (e.g., "A0" of FIG. 30) of received light are generated by the photoelectric converter **11** in a specific phase range (0 to 90 degrees) corresponding to the time width "Tw" of FIG. 30 within one period of the modulation signal, and stored in the charge storage portion **12**. This procedure is repeated plural times, e.g., several ten thousands of times~several hundreds of thousand of times (i.e., several ten thousands of periods~several hundreds of thousand of periods of the modulation

signal) to accumulate signal charges corresponding to the intensity "A0" of received light.

In this case, as shown in FIG. 2B, the voltage applied to the first electrode **12a** of the charge storage portion **12** is maintained constant. On the other hand, as shown in FIG. 2C, a required voltage is applied to the second electrode **14a** of the charge discarding portion **14** for the time period (corresponding to the phase range of 90 to 360 degrees) other than the signal charge generation period, so that the electric charges generated by the photoelectric converter during the time period are discarded as dispensable charges. In other words, since the voltage is not applied to the second electrode **14a** for the signal charge generation period (corresponding to the phase range of 0 to 90 degrees), the electric charges generated by the photoelectric converter **11** during the signal charge generation period is supplied as the signal charges to the charge storage portion **12**.

In this control method, therefore, the stage (FIG. 2B) of applying the voltage to the first electrode **12a** of the charge storage portion **12** is partially overlapped with the stage (FIG. 2C) of applying the voltage to the second electrode **14a** of the charge discarding portion **14**. According to this voltage control, it is possible to extract the signal charges corresponding to the intensity "A0" of received light, as shown in FIG. 2D. In this embodiment, data sampling is performed every quarter of period of the modulation signal.

The above signal extracting treatment shown in FIGS. 2A to 2D are repeated several ten thousands of times~several hundreds of thousand of times to obtain accumulated signal charges corresponding to the intensity "A0" of received light, and then the accumulated signal charges are output to the analyzer **5** through the charge ejector **13**. Similarly, the above procedures are performed to store the accumulated signal charges corresponding to each of the intensities (A0, A1, A2, A3) of received light in the charge storage portion **12**.

Thus, since the image sensor **1** of the present embodiment has the charge discarding portion **14** with the second electrode **14a**, and parts of the electric

charges generated by the photoelectric converter **11** that are not used as the signal charges are aggressively removed as the dispensable charges by controlling the voltage applied to the second electrode **14a**, it is possible to effectively prevent the dispensable charges being mixed as noise components into the signal charges. In addition, since the signal charges are accumulated over several ten thousands of periods to several hundred of thousands of periods of the modulation signal, it is possible to precisely determine the distance information. From the viewpoint of high sensitivity, for example, when the modulation signal is set to 20 MHz, and the signal charges are extracted at 30 frames per second, it is possible to accumulate the signal charges over several hundred of thousands of periods of the modulation signal.

In the above explanation, the constant voltage is applied to the first electrode **12a** during the time period of applying the voltage to the second electrode **14a**. However, by adequately setting a magnitude relation between the voltages applied to the first and second electrodes, it is possible to prevent the signal charges being stored during the stage of removing the electric charges as the dispensable charges.

As a modification of this embodiment, a set of the charge storage portion **12** and the charge discarding portion **14** may be formed every photoelectric converter **11**. In this case, it is possible to obtain the electric charges corresponding to four intensities (A_0 , A_1 , A_2 , A_3) of received light at a time within one period of the modulation signal. As to the timing of data sampling, when phase intervals are predetermined, it is not required to adopt equally spaced phase intervals.

In the present embodiment, the light emitted from the light source **2** is intensity-modulated by the sine wave. However, the intensity modulation may be performed by use of another waveform such as a triangular wave or a saw-tooth wave. In addition, as the light emitted from the light source **2**, infrared light or the like may be used other than the visible light. In place of the image sensor

1 having the matrix arrangement of the photoelectric converters **11**, another image sensor having a one dimensional arrangement of the photoelectric converters **11** may be used. In addition, when measuring the distance information in only one direction in the space, or scanning the light beam irradiated from the light source **2** to the space, it is possible to adopt the image sensor using only four photoelectric converters to determine the distance information. In this embodiment, the photoelectric converters **11** are integrally formed with the charge storage portions **12**. However, functions of the image sensor **1** may be achieved by use of separated parts.

10 <Second Embodiment>

This embodiment presents another sensitivity controlling method for the image sensor of the distance measuring apparatus shown in FIG. 1. That is, as shown in FIGS. 3A to 3D, the control method is characterized in that a stage (FIG. 3B) of applying a voltage to the first electrode **12a** of the charge storage portion **12** is not overlapped with the stage (FIG. 3C) of applying a voltage to the second electrode **14a** of the charge discarding portion **14**.

For example, the light irradiated from the light source **2** to the space is intensity-modulated by a modulation signal shown in FIG. 3A. FIGS. 3B to 3C explain the case of detecting electric charges corresponding to the intensity (e.g., "A0" of FIG. 30) of received light, which are generated by the photoelectric converter in a specific phase range (0 to 90 degrees) corresponding to the time width "Tw" of FIG. 30 within one period of the modulation signal. As shown in FIG. 3B, the voltage is applied to the first electrode **12a** every quarter of period of the modulation signal, i.e., in a specific phase range (0 to 90 degrees) within each period of the modulation signal to send the electric charges generated by the photoelectric converter **11** as the signal charges to the charge storage portion **12**.

On the other hand, as shown in FIG. 3C, the voltage is applied to the second electrode **14a** in the remaining phase range (90 to 360 degrees) other than the specific phase range (0 to 90 degrees), in which the voltage is applied to the first

electrode **12a**, to send the electric charges generated by the photoelectric converter **11** as the dispensable charges to the charge discarding portion **14**. According to the voltage control described above, it is possible to extract the signal charges corresponding to the intensity "A0" of received light, as shown in
5 FIG. 3D.

According to this embodiment, it is possible to separately control the voltages applied to the first and second electrodes without considering the magnitude relation between those voltages, and therefore there is an advantage that it becomes easy to control these voltages. As a result, it is possible to easily
10 control the sensitivity that is a ratio of the signal charges relative to the electric charges generated by the photoelectric converter **11**, and the ratio of the dispensable charges relative to the electric charges generated by the photoelectric converter **11**.

In this embodiment, since the stage of storing the signal charges in the
15 charge storage portion **12** is determined by the voltage applied to the first electrode **12a**, it is possible to shorten the stage of applying the voltage to the second electrode **14a**. For example, the voltage may be applied to the second electrode **14a** for a required time period immediately before the voltage is applied to the first electrode **12a**. Other configuration and operation are substantially the
20 same as the first embodiment.

<Third Embodiment>

This embodiment presents another sensitivity controlling method for the image sensor **1** of the distance measuring apparatus shown in FIG. 1. That is, as shown in FIGS. 4A to 4D, the control method is characterized in that a
25 constant voltage is always applied to the second electrode **14a** of a charge discarding portion **14** to discard parts of the electric charges generated by the photoelectric converter **11** as dispensable charges, and the electric charges generated by the photoelectric converter **11** are stored as signal charges in the charge storage portion **12** in only a stage of applying a voltage to a first electrode

12a of the charge storage portion **12**.

For example, the light irradiated from the light source **2** to the space is intensity-modulated by a modulation signal shown in FIG. 4A. FIGS. 4B to 4C explain the case of detecting electric charges corresponding to the intensity (e.g., "A0" of FIG. 30) of received light, which are generated by the photoelectric converter in a specific phase range (0 to 90 degrees) corresponding to the time width "Tw" of FIG. 30 within one period of the modulation signal. As shown in FIG. 4B, the voltage is applied to the first electrode **12a** every quarter of period of the modulation signal, i.e., in a specific phase range (0 to 90 degrees) within each period of the modulation signal to send the electric charges generated by the photoelectric converter **11** as the signal charges to the charge storage portion **12**.

On the other hand, as shown in FIG. 4C, a constant DC voltage is always applied to the second electrode **14a** to send parts of the electric charges generated by the photoelectric converter **11** as the dispensable charges to the charge discarding portion **14**. However, as described above, since the electric charges generated by the photoelectric converter **11** in the stage of applying the voltage to the first electrode **12a** are sent as the signal charges to the charge storage portion **12**, it is possible to extract the signal charges corresponding to the intensity "A0" of received light, as shown in FIG. 4D.

According to this embodiment, irrespective of the presence or absence of the voltage applied to the first electrode **12a**, predetermined amounts of the electric charges are always discarded to the charge discarding portion **14** by applying the constant voltage to the second electrode **14a**. Therefore, the dispensable charges (residual electric charges) not used as the signal charges can be surely removed by the charge discarding portion **14**.

By the way, even when the electric charges generated by the photoelectric converter **11** are stored as the signal charges in the charge storage portion **12** by applying the voltage to the first electrode **12a**, the predetermined amounts of electric charges are sent as the dispensable charges to the charge discarding

portion 14. Therefore, in the strict sense, to store sufficient amounts of the signal charges in the charge storage portion 12, it is needed to consider the magnitude relation between the voltages applied to the first and second electrodes. However, in a practical sense, since the voltage applied to the second electrode is constant, it is sufficient to control only the voltage applied to the first electrode. Other configuration and operation are substantially the same as the first embodiment.

<Fourth Embodiment>

This embodiment explains about a case of using an interline transfer CCD having a vertical-overflow drain, which is available in the market, as the image sensor 5 of FIG. 1.

As shown in FIG. 5, the image sensor 1 is a 2-dimensional image sensor having a matrix arrangement of 3 x 4 photodiodes 21. The numeral 22 designates a vertical transfer portion composed of a vertical transfer CCD, which is provided adjacent to the photodiodes 21 of each column of the matrix arrangement. The numeral 23 designates a horizontal transfer portion composed of a horizontal transfer CCD, which is provided at a lower side of the vertical transfer portions. In each of the vertical transfer portions 22, a pair of gate electrodes (22a, 22b) are provided every photodiode 21. In the horizontal transfer portion, a pair of gate electrodes (23a, 23b) are provided every vertical transfer portion 22.

The vertical transfer portion 22 is controlled by a 4-phase drive, and the horizontal transfer portion 23 is controlled by a 2-phase drive. That is, four phase control voltages (V1 to V4) are applied to the gate electrodes (22a, 22b) of the vertical transfer portion 22, and two phase control voltages (VH1, VH2) are applied to the gate electrodes (23a, 23b) of the horizontal transfer portion 23. Since this type of driving technique is well known in the field of conventional CCD, a further detail explanation is omitted.

The photodiodes 21, the vertical transfer portions 22 and the horizontal

transfer portion **23** are formed on a single substrate **20**. An overflow electrode **24** that is an aluminum electrode is directly formed on the substrate **20** not through an insulating film so as to surround the whole of the photodiodes **21**, the vertical transfer portions **22** and the horizontal transfer portion **23**, as shown in FIG. 5. When a required magnitude of a positive voltage (V_s) is applied to the overflow electrode **24**, electric charges (electrons) generated by the photodiodes **21** are discarded through the overflow electrode **24**.

That is, in this embodiment, the substrate **20** is used as a part of the overflow drain. Thus, since the overflow drain removes dispensable charges from the electric charges generated by the photodiodes **21** of the photoelectric converters **11**, it functions as the charge discarding portion **14**. Amounts of dispensable charges removed can be controlled by a voltage applied to the overflow electrode **24**. Therefore, the overflow electrode **24** functions as the second electrode **14a**.

Referring to FIG. 6, the image sensor **1** is more specifically explained. In the present embodiment, an n-type semiconductor substrate is used as the substrate **20**. A p-well **31** of p-type semiconductor is formed on a general surface of the substrate **20** over regions for the photodiode **21** and the vertical transfer portion **22** such that a thickness of the p-well at the region for the vertical transfer portion **22** is greater than the thickness of the p-well at the region for the photodiode **21**. In addition, an n⁺-type semiconductor layer **32** is formed on the p-well **31** at the region for the photodiode **21**. As a result, the photodiode **21** is composed of a p-n junction formed by the n⁺-type semiconductor layer **32** and the p-well **31**. A p⁺-type semiconductor surface layer **33** is formed on photodiode **21**. A purpose of forming the surface layer **33** is to prevent that when sending the electric charges generated by the photodiodes **21** to the vertical transfer portion **22**, a surface region of the n⁺-type semiconductor layer **32** functions as a passage for the electric charges. This kind of photodiode is known as a buried photodiode.

On the other hand, a storage transfer layer **34** of n-type semiconductor is formed at the region corresponding to the vertical transfer portion **22** on the p-well **31**. The top surface of the storage transfer layer **34** is substantially flush with the top surface of the surface layer **33**, and the thickness of the storage transfer layer **34** is greater than the thickness of the surface layer **33**. A side of the storage transfer layer **34** contacts the surface layer **33**. A separation layer **35** of p⁺-type semiconductor having the same impurity concentration as the surface layer **33** is formed between the n⁺-type semiconductor layer **32** and the storage transfer layer **34**. The gate electrodes **22a**, **22b** are formed on the storage transfer layer **34** through an insulating film **25**. The gate electrode **22a** is insulated from the gate electrode **22b** by the insulating film **25**. As described above, the gate electrodes **22a**, **22b** are formed every photodiode **21**. One of the gate electrodes **22a**, **22b** has a larger width than the other one.

Specifically, as shown in FIG. 7, the gate electrode **22b** having the small width is configured in a planar shape, and the gate electrode **22a** having the large width is formed with a flat portion and a pair of curved portions extending from opposite ends of the flat portion. The gate electrodes **22a**, **22b** are disposed such that the curved portion of the gate electrode **22a** is partially overlapped with the gate electrode **22b** in the height direction. In addition, the top surface of the flat portion of the gate electrode **22a** is substantially flush with the top surface of the gate electrode **22b**. Therefore, the gate electrodes **22a**, **22b** are alternately disposed on the storage transfer layer **34** in the length direction of the vertical transfer portion **22**. The insulating film **25** is made of silicon dioxide. The gate electrodes **22a**, **22b** are made of polysilicon. In addition, a surface of the substrate **20** other than areas corresponding to the photodiodes **21** is covered with a light-shielding film **26**.

Next, a mechanism of driving the image sensor **1** described above is explained. When the light provided from the space is incident on the photodiode **21**, electric charges are generated by the photodiode **21**. In addition, a ratio of

the electric charges supplied as the signal charges into the vertical transfer portion **22** relative to the electric charges generated by the photodiodes **21** can be determined according to a relationship between the voltage applied to the gate electrode **22a** and the voltage applied to the overflow electrode **24**. Specifically, the above-described ratio is determined in accordance with a relationship between a depth of a potential well formed in the storage transfer layer **34** according to the voltage applied to the gate electrode **22a** and a time period of applying the voltage to the gate electrode **22a**, and a potential gradient formed between the photodiode **21** and the substrate **20** according to the voltage applied to the overflow electrode **24** and a time period of applying the voltage to the overflow electrode **24**.

The voltages applied to the gate electrode **22a** (corresponding to the first electrode **12a**) and the overflow electrode **24** (corresponding to the second electrode **14a**) can be controlled according to one of the voltage control methods explained in the first to third embodiments. In this embodiment, those voltages are controlled by the method of the first embodiment, i.e., such that the stage of applying the voltage to the gate electrode **22a** is partially overlapped with the stage of applying the voltage to the overflow electrode **24**, as shown in FIGS. 2A to 2D.

A ratio of the electric charges supplied to the vertical transfer portion **22** relative to the electric charges generated by the photodiode **21** changes in accordance with the voltages applied to the gate electrodes **22a**, **22b**. That is, at the vertical transfer portion **22**, since the gate electrodes **22a**, **22b** are formed on the storage transfer layer **34** through the insulating film **25**, a potential well is formed in the storage transfer portion **34** at the region corresponding to each of the gate electrodes **22a**, **22b** by applying the voltages to the gate electrodes **22a**, **22b**. As a result, the electric charges can be stored in a capacity determined by depth and width of the potential well. Thus, the potential well functions as the charge storage portion **12** for storing the signal charges.

In addition, the electric charges stored in the vertical transfer portion **22** can be output to the analyzer **5** through the horizontal transfer portion **23** by controlling a magnitude of the voltages applied to the gate electrodes **22a**, **22b**, **23a**, **23b** and the timings of applying the voltages to the respective gate electrodes. Therefore, the vertical transfer portion **22** and the horizontal transfer portion **23** function as the charge ejector **13**.

For example, by controlling the voltage applied to the overflow electrode **24**, the electric charges generated by the photodiode **21** are allowed to migrate toward the vertical transfer portion **22**, as described below. That is, FIG. 8 is a schematic diagram showing a change in electron potential along the dotted-line "L1" in FIG. 6. A region designated by the numeral **21** in FIG. 8 corresponds to the photodiode. A region designated by the numeral **20** in FIG. 8 corresponds to the substrate. A region designated by the numeral **22** in FIG. 8 corresponds to the vertical transfer portion. When the voltage is not applied to the overflow electrode **24**, a potential barrier "B1" is formed by the p-well **31** between the photodiode **21** and the substrate **20**. In addition, when the voltages are not applied to the gate electrodes **22a**, **22b**, a potential barrier "B2" is formed by the separation layer **35** between the photodiode **21** and the vertical transfer portion **22**. Therefore, the height of the potential barrier "B2" can be changed by controlling magnitudes of the voltages applied to the gate electrodes **22a**, **22b**, and the height of the potential barrier "B1" can be changed by controlling a magnitude of the voltage applied to the overflow electrode **24**. In FIG. 8, "e" designates electron.

FIGS. 9A to 9C show relationships between voltages applied to the gate electrode **22a** and the overflow electrode **24** and movements of the electric charges generated by the photodiode **21**. In FIG. 9A, the potential barrier "B2" formed by the separation layer **35** is removed by applying a relatively high positive voltage (V1) to the gate electrode **22a**, and a potential well **27** is formed in the storage transfer layer **34**. At this time, a relatively low voltage (Vs) is

applied to the overflow electrode **24** to form the potential barrier "B1". The electric charges generated by the photodiode **21** can not migrate toward the substrate **20** by the presence of the potential barrier "B1". As a result, the electric charges can not be discarded, and therefore the electric charges
5 generated by the photodiode **21** migrate as the signal charges to the vertical transfer portion **22** as the capacity of the potential well **27** allows.

On the other hand, in FIG. 9B, a relatively high positive voltage (V_1) is applied to the gate electrode **22a**, as shown in FIG. 9A, and also a relatively high positive voltage (V_s) is applied to the overflow electrode **24**. The voltage applied
10 to the overflow electrode **24** is determined such that a potential of the substrate **20** is lower than the potential of the vertical transfer portion **22**. Since the potential barrier "B1" formed by the p-well **31** is removed, and a potential gradient of the substrate **20** against the photodiode **21** is greater than the potential gradient of the vertical transfer portion **22** against the photodiode **21**, most of the
15 electric charges generated by the photodiodes **21** migrate as the dispensable charges to the substrate **20**, and then discarded, as shown by the arrow in FIG. 9B.

That is, the ratio of the signal charges in the electric charges generated by the photodiode **21** remarkably reduces, as compared with the case of FIG. 9A.
20 This means a reduction in sensitivity of the photoelectric converter **11**. The sensitivity defined as a ratio of the signal charges and the dispensable charges is determined by the magnitude relation between the voltages applied to the gate electrode **22a** and the overflow electrode **24**. Since the electric charges (electrons) easily migrate toward a lower electron potential, the electric charges
25 supplied into the vertical transfer portion **22** are stored in the potential well **27** having a lower potential than the photodiode **21**, as shown in FIG. 9A, and the stored electric charges can not migrate toward the substrate **20**, as shown in FIG. 9B.

To read out the signal charges stored in the vertical transfer portion **22**, the

applied voltage (V1) is removed from the gate electrode 22a (or a relatively small voltage (V1) may be applied to the gate electrode 22a) to form the potential barrier "B2". In addition, a relatively small voltage (Vs) is applied to the overflow electrode 24 to form the potential barrier "B1". The formation of the potential barrier "B1" is not necessarily required. It is important to form the potential barrier "B2". The formation of the potential barrier "B2" inhibits an inflow of the electric charges from the photodiode 21 to the vertical transfer portion 22, and an outflow of the electric charges from the vertical transfer portion 22 to the photodiode 21. Under this condition, the signal charges stored in the vertical transfer portion 22 are sent to the analyzer 5 through the horizontal transfer portion 23.

The signal charges stored in the vertical transfer portion 22 are read out every time that the signal charges corresponding to one intensity (A0~A3) of received light are detected. For example, after the signal charges corresponding to the integral "A0" are stored in the potential well 27, they are read out. Next, after the signal charges corresponding to the integral "A1" are stored in the potential well 27, they are read out. Thus, the procedures of storing and reading out the signal charges are repeated. It goes without saying that the time period of storing the signal charges corresponding to the intensity (A0~A3) of received light is constant. In addition, the sequence of reading out the signal charges corresponding to the intensity (A0~A3) of received light is not limited to the above-described case. For example, after the signal charges corresponding to the intensity (A0) of received light is extracted, the signal charges corresponding to the intensity (A2) of received light may be extracted. Other configuration and operation are substantially the same as the first embodiment.

<Fifth Embodiment>

This embodiment explains about a case of using an interline transfer CCD having a lateral-overflow drain, which is available in the market, as the image sensor 1 of FIG. 1.

In the image sensor **1** of this embodiment, as shown in FIG. 10, an overflow drain **41** of n-type semiconductor is formed adjacent to each of columns of a matrix arrangement (3 x 4) of the photodiodes **21**. In this case, the image sensor **1** has three overflow drains **41**. The overflow drains **41** are connected at their upper ends to each other by an overflow electrode **24** that is an aluminum electrode. The vertical transfer portion **22** and the horizontal transfer portion **23** have substantially same functions to them of the image sensor **1** of the fourth embodiment.

Referring to FIG. 11, the image sensor **1** is more specifically explained. In the present embodiment, a p-type semiconductor substrate is used as the substrate **40**. An n⁺-type semiconductor layer **42** is formed in a general surface of the substrate **40** over a region, at which the formation of the photodiode **21** is intended. Therefore, the photodiode **21** is composed of the n⁺-type semiconductor layer **42** and the substrate **40**. On the other hand, a storage transfer layer **44** of n-type semiconductor is formed in the general surface of the substrate **40** over a region, at which the formation of the vertical transfer portion **22** is intended.

A separation layer **45a** of p⁺-type semiconductor is formed between the n⁺-type semiconductor layer **42** and the storage transfer layer **44**. A separation layer **45b** of p⁺-type semiconductor is formed between the n⁺-type semiconductor layer **42** and the overflow drain **41**. The numeral **43** designates a p⁺-type semiconductor surface layer having the same impurity concentration as the separation layers **45a**, **45b**, which is formed on the n⁺-type semiconductor layer **42** and the separation layers **45a**, **45b**. This surface layer **43** prevents that the electric charges generated by the photodiode **21** migrate to the vertical transfer portion **22** through the surface of the n⁺-type semiconductor layer **42**.

A top surface of the storage transfer layer **44** is substantially flush with the top surfaces of the surface layer **43** and the overflow drain **41**. In addition, a thickness of the overflow drain **41** is larger than the thickness of the n⁺-type

semiconductor layer **42**. Gate electrodes **22a**, **22b** are formed every photodiode **21** on the storage transfer layer **44** through an insulating film **25**. One of the gate electrodes **22a**, **22b** has a larger width than the other one. In addition, the surface of the image sensor **1** other than areas for allowing the photodiodes **21** to receive the light is covered with a light-shielding film **26**. These are same as the image sensor **1** of the fourth embodiment.

As understood from comparison between FIG. 12 showing a change in electron potential along the dotted line "L2" in FIG. 11, FIGS. 13A to 13C and FIGS. 8, 9A to 9C, the present embodiment is different from the fourth embodiment only in that the electric charges generated by the photodiode **21** are discarded by the overflow drain **41** in place of the substrate **20** of the fourth embodiment. In addition, as compared with the n⁺-type semiconductor layer **32** constructing the photodiode **21** of the interline transfer CCD having the vertical-overflow drain according to the fourth embodiment, the photodiode **21** of the interline transfer CCD having the lateral-overflow drain according to the present embodiment can be formed by the n⁺-type semiconductor layer **42** having a larger thickness.

That is, in the case of forming the vertical overflow drain, it is needed to form the photodiode **21** on the substrate **20**. However, in the case of forming the lateral-overflow drain, since the substrate **40** is used as the semiconductor layer constructing the photodiode **21**, it becomes possible to increase the thickness of the n⁺-type semiconductor layer **42**. In addition, there is an advantage that the sensitivity to infrared is improved, as compared with the fourth embodiment. Other configuration and performance are substantially the same as the fourth embodiment.

<Sixth Embodiment>

This embodiment explains about a case of using a frame transfer CCD having a vertical-overflow drain, which is available in the market, as the image sensor **1** of FIG. 1.

As shown in FIG. 14, the image sensor **1** of this embodiment is a 2-dimensional image sensor having a matrix (4 x 4) arrangement of photodiodes **21**. This image sensor **1** is provided with an image pickup portion "D1" including a plurality of vertical transfer CCDs, each of which is composed of the photodiodes **21** aligned in the vertical direction, and a storage portion "D2" formed adjacent to the image pickup portion "D1", which is an array of vertical transfer CCDs not having the photoelectric conversion capability. In FIG. 14, the numeral **23** designates a horizontal transfer portion formed adjacent to the storage portion "D2", which is composed of by a horizontal transfer CCD. The horizontal transfer portion functions as a charge ejector.

In this embodiment, the photodiode **21** and the vertical transfer CCD have the capability of storing electric charges and transferring the electric charges in the vertical direction. Therefore, the image pickup portion "D1" and the storage portion "D2" function as a charge storage portion. Each of the columns of the image pickup portion "D1" has four photodiodes **21**, each of which is formed at the light receiving surface with three gate electrodes **21a~21c** aligned in the vertical direction. Each of the columns of the storage portion "D2" has two sets of three gate electrodes **28a~28c**. In addition, in the horizontal transfer portion **23**, a pair of gate electrodes **23a, 23b** are formed every column of the storage portion "D2", as in the case of the fourth embodiment.

The gate electrodes **21a~21c** are driven by 6-phase control voltages "V1" ~ "V6", and the gate electrodes **28a~28c** are driven by 3-phase control voltages "VV1" ~ "VV3". The gate electrodes **23a, 23b** are driven by 2-phase control voltages "VH1", "VH2". The horizontal transfer portion **23** outputs the signal charges from the storage portion "D2" every one horizontal line. Since this type of driving technique is well known in the field of CCDs, further detailed explanation is omitted.

The image pickup portion "D1", the storage portion "D2" and the horizontal transfer portion **23** are formed on a single substrate **50**. An overflow electrode

24 that is an aluminum electrode is formed directly on the substrate 50 not through an insulating film. That is, the substrate 50 functions as an overflow drain. The overflow electrode 24 is formed on the substrate 50 so as to surround the whole of the image pickup portion "D1", the storage portion "D2" and the horizontal transfer portion 23. A surface of the substrate 50 other than areas corresponding to the photodiodes 21 is covered with a light shielding film (not shown).

Referring to FIG. 15, the image sensor 1 is more specifically explained. In the present embodiment, an n-type semiconductor substrate is used as the substrate 50. A p-type semiconductor layer 51 is formed on a general surface of the substrate 50 over a region, at which the formation of the photodiode 21 is intended. In addition, an n-well 52 of n-type semiconductor is formed in the p-type semiconductor layer 51. The three gate electrodes 21a~21c are formed on top surfaces of the p-type semiconductor layer 51 and the n-well 52 through an insulating film 53 of silicon dioxide. That is, in this embodiment, a MIS-type photodiode 21 is formed by the n-well 52, the insulating film 53 and the gate electrodes 21a to 21c. Each of the gate electrodes 21a~21c is made of polysilicon. The n-well 52 is continuously formed over the image pickup portion "D1" and the storage portion "D2". In the n-well 52 of the image pickup portion "D1", the electric charges are generated, stored and transferred, and in the n-well 52 of the storage portion "D2", the electric charges are stored and transferred.

Next, a mechanism of driving the image sensor 1 described above is explained. When the light provided from the space is incident on the photodiode 21, electric charges are generated by the photodiode 21. When suitable voltages are applied to the gate electrodes 21a~21c, a potential well is formed as the charge storage portion in the n-well 52. Therefore, the generated electric charges can be stored in the potential well. In addition, the depth of the potential well can be changed by controlling the voltages applied to the gate electrodes 21a~21c to transfer the electric charges. On the other hand, when a suitable

voltage "Vs" is applied to the overflow electrode **24**, the electric charges generated by the photodiode **21** are discarded through the substrate **50**. Therefore, by controlling the voltage applied to the overflow electrode **24** and a time period of applying the voltage to the overflow electrode **24**, it is possible to
5 change a ratio of the signal charges stored in the potential well of the n-well **52** relative to the electric charges generated by the photodiode **21**.

Referring to FIG. 16 showing a change in electron potential along the dotted line "L3" in FIG. 15, migrations of electric charges generated by the photodiode **21** are explained. The region designated by the numeral **21** in FIG. 16
10 corresponds to the photodiode. The region designated by the numeral **50** in FIG. 16 corresponds to the substrate. When no voltage is applied to the overflow electrode **24**, a potential barrier "B3" is formed by the p-type semiconductor layer **51** between the photodiode **21** (n-well **52**) and the substrate **50**. On the other hand, at the opposite side of the photodiode **21**, a potential barrier "B4" is formed
15 by the p-type semiconductor layer **51** to prevent a leakage of the electric charges (electrons "e") generated by the photodiode **21** to the outside. A height of the potential barrier "B3" can be changed by controlling a magnitude of the voltage applied to the overflow electrode **24**.

On the other hand, amounts of electric charges stored in the potential well, which is formed in the n-well **52** by applying the voltages to the gate electrodes **21a~21c**, are determined according to the depth of the potential well, which can
20 be changed by controlling magnitudes of the voltages applied to the gate electrodes **21a~21c**. That is, when the magnitude of the voltage applied to the gate electrode **21b** is higher than the magnitudes of the voltages applied to the gate electrodes **21a, 21c**, the potential well is formed to have a maximum depth at
25 its center region, as shown in FIG. 17.

By applying a suitable voltage to the overflow electrode **24** such that the potential of the substrate **50** is lower than the potential of the n-well **52**, voltages to the gate electrodes **21a, 21c** to remove the potential barrier "B3", and a voltage

to the gate electrode **21b** to form the potential barrier "B3", as shown in FIGS. 18A to 18C, it is possible to store large amounts of electric charges (electrons "e") at the center region of the potential well shown in FIG. 18B, and discard the electric charges at the both side regions shown in FIGS. 18A and 18C through the substrate **50**.

By the way, parts of electric charges generated at the side gate electrodes **21a**, **21c** may flow into the potential well **27** corresponding to the center gate electrode **21b** as noise components during a time period that the electric charges are generated by the photodiode **21**. In addition, since the signal charges are transferred every time that the signal charges corresponding to one intensity (A0, A1, A2, A3) of received light can be detected, the electric charges generated by the photodiode **21** may be mixed as the noise components during a time period of transferring the signal charges. However, these noise components are averaged by integration, and substantially removed by subtraction performed to determine the phase difference " ψ ". Therefore, the influence of these noise components becomes small. As a result, it is possible to accurately determine the phase difference " ψ " even when using the frame transfer CCD.

In the above case, the three gate electrodes **21a~21c** are formed every photodiode **21**. However, the number of gate electrodes corresponding to one photodiode is not limited to this embodiment. Other configuration and performance are substantially the same as the fourth embodiment.

<Seventh Embodiment>

This embodiment explains about a case of using a frame transfer CCD having a lateral-overflow drain, which is available in the market, as the image sensor **1** of FIG. 1.

As shown in FIG. 19, the image sensor **1** of this embodiment is a 2-dimensional image sensor having a matrix (4 x 4) arrangement of photodiodes **21**. An overflow drain **61** of n-type semiconductor is formed for each of columns of the matrix arrangement of the photodiodes **21**. In this embodiment, the image

sensor 1 has four overflow drains 61. The overflow drains 61 are connected at their upper ends to each other by an overflow electrode 24 that is an aluminum electrode. The image pickup portion "D1", the storage portion "D2" and the horizontal transfer portion 23 have the same functions to them of the image sensor 1 of the sixth embodiment.

Referring to FIG. 20, the image sensor 1 of this embodiment is more specifically explained. That is, a p-type semiconductor substrate is used as the substrate 60. A p-type semiconductor layer 62 is formed on a general surface of the substrate 60. In addition, an n-well 63 of n-type semiconductor is formed in the p-type semiconductor layer 62. Therefore, the photodiode 21 is composed of the p-type semiconductor layer 62 and the n-well 63 provide. A p⁺-well 64 of p⁺-type semiconductor is formed adjacent to the n-well 63 in the p-type semiconductor layer 62. The overflow drain 61 of n-type semiconductor is formed in a top surface of the p⁺-well 64. Thus, the image sensor 1 of this embodiment has basically same structure as the image sensor of the sixth embodiment except for using the substrate 60 having a different conductivity type and forming the overflow drain 61. As compared with the sixth embodiment, there is an advantage that the image sensor of this embodiment has a higher sensitivity to infrared.

As understood from comparison between FIG. 21 showing a change in electron potential along the dotted line "L4" of FIG. 20 and FIG. 16, the present embodiment is different from the sixth embodiment in that the electric charges generated by the photodiode 21 are discarded through the overflow drain 61 in place of the substrate 50 of the sixth embodiment. Amounts of electric charges stored in a potential well, which is formed in the n-well 63 by applying voltages to gate electrodes 21a~21c, are determined by the depth of the potential well, which can be changed by controlling magnitudes of the voltages applied to the gate electrodes 21a~21c. That is, when the magnitude of the voltage applied to the gate electrode 21b is higher than the magnitudes of the voltages applied to

the gate electrodes **21a**, **21c**, the potential well corresponding to the center gate electrode **21b** has a maximum depth.

When a suitable voltage is applied to the overflow electrode **24** to lower the potential barrier "B3", electric charges (electrons "e") are stored in the potential well corresponding to the center gate electrode **21b**, as shown in FIG. 22B, and electric charges generated at the regions corresponding to the side gate electrodes **21a**, **21c** are discarded by the overflow drain **61**, as shown in FIGS. 22A and 22C. Other configuration and performance are substantially the same as the sixth embodiment.

<Eighth Embodiment>

As explained in the sixth and seventh embodiments, when using the frame transfer CCD as the image sensor **1**, the number of gate electrodes formed every photodiode **21** is not limited to three. In this embodiment, four gate electrodes are formed every photodiode **21**.

In FIGS. 23A and 23B, the numerals **1~4** respectively designate first, second, third and fourth gate electrodes. One cycle of the numerals **1~4** corresponds to one photodiode **21**. FIG. 23A shows a charge storing period of storing electric charges generated by the photodiode **21**, and FIG. 23B shows a charge discarding period of discarding dispensable charges. A threshold value "Th1" designates a potential of overflow drain.

As shown in FIG. 23A, in the charge storing period, a potential barrier is formed between adjacent photodiodes **21** by not applying a voltage to the first gate electrode (**1**) in order to prevent that electric charges generated by the photodiodes **21** are mixed to each other. In addition, when magnitudes of voltages applied to the second, third and the fourth gate electrodes (**2**)~(**4**) are changed in a stepwise manner, it is possible to obtain a step-like potential well having different depths. Each of regions of the potential well corresponding to the third and fourth gate electrodes (**3**), (**4**) has an electron potential higher than the threshold value "Th1". The potential well has a maximum depth (the lowest

electron potential) at a region corresponding to the second gate electrode (2). Since this electron potential is lower than the threshold value "Th1", electric charges (electrons "e") generated by the photodiode 21 are mainly stored in the region corresponding to the second gate electrode (2).

5 On the other hand, as shown in FIG. 23B, in the charge discarding period, electron potentials of the regions corresponding to the third and fourth gate electrodes (3), (4) are increased to prevent a leakage of electric charges stored in the region corresponding to the second gate electrode (2) that has the lowest electron potential within the charge storing period. Thereby, electric charges
10 generated at the regions corresponding to the first, third and the fourth gate electrodes (1), (3), (4) in the charge storing period flow into the overflow drain and the region corresponding to the second gate electrode (2). In other words, in the charge storing period shown in FIG. 23B, the voltages applied to the gate electrodes (1) to (4) are controlled to form potential barriers for electrically
15 isolating the region corresponding to the second gate electrode (2) having the lowest electron potential from the circumstances. Therefore, it is possible to change a ratio of the dispensable charges to be discarded relative to the electric charges generated by the photodiode 21 by adequately controlling a ratio of the charge storing period to the charge discarding period. This means that the
20 sensitivity is adjustable. Other configuration and performance are substantially the same as the sixth or seventh embodiment.

<Ninth Embodiment>

In this embodiment, six gate electrodes are formed every photodiode 21. In FIGS. 24A and 24B, the numerals 1~6 respectively designate first, second,
25 third, fourth, fifth and sixth gate electrodes. One cycle of the numerals 1~6 corresponds to one photodiode 21. FIG. 24A shows a charge storing period of storing electric charges generated by the photodiode 21, and FIG. 24B shows a charge discarding period of discarding dispensable charges. A threshold value "Th2" designates a potential of overflow drain.

As shown in FIG. 24A, in the charge storing period, a potential barrier is formed between adjacent photodiodes **21** by not applying a voltage to the first gate electrode **(1)** in order to prevent that electric charges generated by the photodiodes **21** are mixed to each other. The potential well has a maximum depth at a region corresponding to the fourth gate electrode **(4)**. Electron potentials of regions corresponding to the second, third, fifth and the sixth gate electrodes **(2)**, **(3)**, **(5)**, **(6)** are changed in a stepwise manner so as to be higher than the threshold value "Th2". Since the region of the potential well corresponding to the fourth gate electrode **(4)** has the maximum depth, which is lower than the threshold value "Th2", electric charges (electrons "e") generated by the photodiode **21** are mainly stored in this region.

FIG. 25A is an explanatory view of 3-dimensionally illustrating the electron potentials of the regions corresponding to the gate electrodes **(1)** to **(6)** in the charge storing period. "V1" to "V6" shown in this figure respectively correspond to vertical transfer voltages "V1" to "V6" shown in FIG. 19, and "LOD" corresponds to overflow drains **61**. Electrons lying in regions corresponding to the gate electrodes **(2)** and **(6)**, to which the voltages "V2" and "V6" are being applied, migrate toward regions corresponding to the gate electrodes **(3)** and **(5)**, to which the voltages "V3" and "V5" are being applied. In addition, the electrons lying in the regions corresponding to the gate electrodes **(3)** and **(5)** migrate toward a region corresponding to the gate electrode **(4)**, to which the voltage "V4" is being applied. As a result, the electrons are stored in the region of the potential well corresponding to the gate electrode **(4)**.

On the other hand, as shown in FIG. 24B, in the charge discarding period, electron potentials of the regions corresponding to the second, third, fifth and sixth gate electrodes **(2)**, **(3)**, **(5)**, **(6)** are increased to prevent a leakage of electric charges stored in the region corresponding to the fourth gate electrode **(4)** that has the lowest electron potential within the charge storing period. Thereby, electric charges generated at the regions corresponding to the first, second, third,

fifth and sixth gate electrodes (1), (2), (3), (5), (6) in the charge storing period flow into the overflow drain and the region corresponding to the fourth gate electrode (4).

FIG. 25B is an explanatory view of 3-dimensionally illustrating the electron potentials of the regions corresponding to the gate electrodes (1) to (6) in the charge discarding period. When the voltages "V3" and "V5" are reduced so as to be substantially equal to the voltage "V1", the region corresponding to the gate electrode (4), to which the voltage "V4" is being applied, is electrically isolated from the circumstances, so that an inflow of electrons to the region is inhibited. In addition, by setting the electron potential of the overflow drain (LOD) electrode to be higher than the gate electrode (4), to which the voltage "V4" is being applied, and lower than the gate electrodes (2), (6), to which the voltages "V2", "V6" are being applied, it is possible to discard the electrons generated at the regions corresponding to the gate electrodes (2), (6) to the overflow drain electrode without discarding the electrons stored in the region corresponding to the gate electrode (4).

Therefore, as in the case of the eighth embodiment, it is possible to change a ratio of the dispensable charges to be discarded relative to the electric charges generated by the photodiode 21 by appropriately controlling a ratio of the charge storing period to the charge discarding period. This means that the sensitivity is adjustable. Other configuration and performance are substantially the same as the sixth or seventh embodiment.

<Tenth Embodiment>

As described above, when using the frame transfer CCD as the image sensor 5, electric charges generated by the photodiode 21 in time periods other than the time periods of extracting the signal charges corresponding to the intensities (A0~A3) of received light may be mixed as the noise components into the signal charges. The noise components are substantially constant, and averaged by storing the electric charges the time periods of extracting the signal

charges corresponding to the intensities ($A_0 \sim A_3$) of received light. Therefore, it is possible to remove the noise components to some extent and determine the phase difference " ψ ".

However, the S/N ratio reduces due to the noise components. For example, when a larger dynamic range is needed at regions for storing or transferring the electric charges, the cost/performance of the distance measuring apparatus deteriorates. In the present embodiment, as shown in FIGS. 26A and 26B, light-shielding films **65** are formed on the region of storing the signal charges and the region not relating to the generation of electric charges of the photodiodes **21**.

In FIGS. 26A and 26B, as in the case of the ninth embodiment, six gate electrodes (1) to (6) are formed every photodiode **21**. Specifically, the light-shielding film **65** is formed at the regions corresponding to the gate electrodes (1) and (4), so that electric charges (electrons "e") are generated only at the regions corresponding to the gate electrodes (2), (3), (5) and (6) of the respective photodiode **21**. As a result, the gate electrode (4) does not substantially contribute the generation of electric charges. In other words, the noise components do not occur at the gate electrode (4). Therefore, as compared with the case of not forming the light-shielding film **65**, it is possible to improve the S/N ratio. Alternatively, the light-shielding film **65** may be formed at the regions corresponding to the gate electrodes (1), (3), (4) and (5), so that electric charges (electrons "e") are generated only at the regions corresponding to the gate electrodes (2) and (6) of the photodiode **21**. Other configuration and performance are substantially the same as the ninth embodiment.

In the fourth or tenth embodiment, the timing of applying the voltages to the first and second electrodes were controlled by the method explained in the first embodiment. Alternatively, the method explained in the second or third embodiment may be used.

In the above-explained embodiments, the electric charges are output every

time that the signal charges corresponding to one intensity (A0, A1, A2, A3) of received light are detected. According to an image sensor 1 explained below, it is possible to simultaneously detect the signal charges corresponding to at least two intensities (A0, A1, A2, A3) of received light.

5 <Eleventh Embodiment>

In this embodiment, a modification of the frame transfer CCD having the overflow-drain of FIG. 19 is used as the image sensor 1. That is, as shown in FIG. 27, overflow drains (61a, 61b) are alternately disposed such that each of the overflow drains is formed every photodiode 21. Therefore, the electric charges
10 generated by each of the photodiodes 21 can be separately discarded.

A ratio of the signal charges supplied into the potential well of the charge storage portion relative to the electric charges generated by the photodiode 21 can be changed by applying the voltage to each of the overflow drains 61a, 61b in synchronization with the period of the modulation signal. In this embodiment,
15 the timing of applying the voltage to the overflow drain 61a is different by 180 degrees from the timing of applying the voltage to an adjacent overflow drain 61b in a direction of transferring the signal charges. Thus, by applying the two voltages having different phases (ϕ_1 , ϕ_2) to the overflow drains 61a, 61b, the signal charges corresponding to these two phases of the modulation signal, which
20 are different from each other by 180 degrees, can be respectively stored in the potential wells formed in the corresponding photodiodes 21.

That is, the signal charges corresponding to two of four intensities (A0~A3) of received light required to determine the phase difference " ψ " can be simultaneously extracted. For example, the signal charges corresponding to the
25 intensities (A0 and A3) of received light are simultaneously extracted, and then the signal charges corresponding to the intensities (A1 and A2) of received light are simultaneously extracted.

In this embodiment, since the signal charges are mixed with extraneous electric charges with an intended purpose, they become noise components.

However, amounts of the extraneous electric charges are much smaller than the signal charges, and the extraneous electric charges are mixed at a substantially constant ratio with the signal charges. Therefore, the noise components have a minimal influence on determining the phase difference " ψ ". Other configuration and performance are substantially the same as the seventh embodiment.

<Twelfth Embodiment>

In this embodiment, a modification of the interline transfer CCD having the lateral overflow-drain is used as the image sensor **5** in place of the modification of the frame transfer CCD. That is, as shown in FIG. 28, overflow drains (**41a**, **41b**) are alternately disposed adjacent to the photodiodes **21** aligned in the vertical direction such that each of the overflow drains is provided every photodiode **21**. In the vertical transfer portion **22**, three gate electrodes **22a**~**22c** are provided every photodiode **21**.

In this image sensor **1**, voltages are applied at different phases of the modulation signal to the adjacent overflow drains **41a**, **41b** in the vertical direction. In addition, as in the case of the eleventh embodiment, the gate electrodes **22a**~**22c** are driven by 6 phase control voltages. As a result, it is possible to simultaneously obtain the signal charges corresponding to two of the four intensities (**A0**~**A3**) of received light. Other configuration and performance are substantially the same as the eleventh embodiment.

<Thirteen Embodiment>

In the eleventh and twelfth embodiments, three gate electrodes are provided every overflow drain. However, the number of gate electrodes provided every overflow drain may be four or more. In addition, when voltages are applied to four different overflow drains at four timings, which are different from each other by 90 degrees with respect to the phase of the modulation signal, it is possible to simultaneously obtain the signal charges corresponding to four intensities (**A0**~**A3**) of received light. Moreover, the timing of applying each of voltages may be a specific phase synchronized with the period of the modulation signal. An

interval between the timings of applying the voltages can be optionally determined.

In the above embodiments, the interline transfer CCD or the frame transfer CCD were used as the image sensor 1. In addition, a frame interline transfer
5 CCD may be used, which is obtained by replacing the image pickup portion "D1" of the frame transfer CCD of FIG. 14 with photodiodes 21 and vertical transfer portions 22 of the interline transfer CCD, as shown in FIG. 29. In this case, there is an advantage of preventing the occurrence of smear, as compared with the frame transfer CCD.

10 In the above-explained embodiments, an image sensor having one dimensional array of photodiodes may be used in place of the image sensor 1. In addition, only one photoelectric converter 11 may be used in the first embodiment. The analyzer used in the above embodiments provides the distance information. However, as the information concerning the intended
15 space, only the phase difference " ψ " may be determined. Alternatively, the analyzer may determine another spatial information concerning the intended space according to the intensity of received light.

INDUSTRIAL APPLICABILITY

20 As described above, according to the spatial information detecting apparatus of the present invention, by controlling the voltage applied to an electrode of the charge discarding portion at the timing synchronized with the period of a modulation signal, it is possible to surely remove residual electric charges, which are dispensable charges not used as signal charges, of the
25 electric charge generated by the photoelectric converter before they are transferred to charge storage portion, and as a result remarkably improve S/N ratio.

In the case of using a spatial information detecting apparatus with a conventional CCD image sensor having an overflow drain electrode, it is possible

to adequately control the sensitivity of the CCD image sensor by removing dispensable charges from electric charges generated by photoelectric converters of the CCD image sensor according to a control voltage applied to the overflow electrode in synchronization with the period of the modulation signal, and storing
5 the balance of the electric charges as the signal charges in a charge storage area of the CCD image sensor.

The spatial information detecting apparatus of the present invention is widely available to any devices required to determine a phase difference between the intensity-modulated light and the received light, and particularly suitable to the
10 distance measuring apparatus.

CLAIMS:

1. A spatial information detecting apparatus using intensity-modulated light comprising:

5 at least one photoelectric converter for receiving a light provided from a space, into which a light intensity-modulated by a predetermined modulation signal is being irradiated, and generating amounts of electric charges corresponding to an intensity of received light;

charge discarding means having a first electrode for removing dispensable
10 charges from the electric charges generated by said photoelectric converter according to a voltage applied to said first electrode;

charge storage means for storing signal charges from the electric charges generated by said photoelectric converter;

a control circuit for controlling the voltage applied to said first electrode at a timing
15 synchronized with a period of said modulation signal to change a ratio of the signal charges stored in said charge storage means to the electric charges generated by said photoelectric converter;

a charge ejector for outputting the signal charges from said charge storage means; and

20 an analyzer for determining spatial information from an output of said charge ejector.

2. The spatial information detecting apparatus as set forth in claim 1, wherein said
25 charge storage means has a second electrode, and said control circuit controls a voltage applied to said second electrode constant to transfer required amounts of the electric charges generated by said photoelectric converter to said charge storage means.

3. The spatial information detecting apparatus as set forth in claim 2, wherein said control circuit controls the voltages applied to said first electrode and said second electrode so as to alternately switch between a stage of transferring the electric charges generated by said photoelectric converter to said charge storage means and a stage of transferring the electric charges generated by said photoelectric converter to said charge discarding means.

4. A spatial information detecting apparatus using intensity-modulated light comprising:

at least one photoelectric converter for receiving a light provided from a space, into which a light intensity-modulated by a predetermined modulation signal is being irradiated, and generating amounts of electric charges corresponding to an intensity of received light;

charge discarding means having a first electrode for removing dispensable charges from the electric charges generated by said photoelectric converter according to a voltage applied to said first electrode;

charge storage means having a second electrode for storing signal charges from the electric charges generated by said photoelectric converter according to a voltage applied to said second electrode;

a control circuit for controlling the voltage applied to said second electrode at a timing synchronized with a period of said modulation signal, while applying a constant voltage to said first electrode, to change a ratio of the signal charges stored in said charge storage means to the electric charges generated by said photoelectric converter;

a charge ejector for outputting the signal charges from said charge storage means; and

an analyzer for determining spatial information from an output of said charge

ejector.

5. The spatial information detecting apparatus as set forth in claim 1, wherein said
5 at least one photoelectric converter is a plurality of photoelectric converters, and
the spatial information detecting apparatus includes a CCD image sensor having
said photoelectric converters, said charge storage means and said charge ejector,
and wherein said CCD image sensor has an overflow drain as said charge
discarding means.

10

6 The spatial information detecting apparatus as set forth in claim 1, wherein said
at least one photoelectric converter is a plurality of photoelectric converters,

15 a set of photoelectric converters is selected from said photoelectric
converters to define one pixel,

said control circuit allows said charge storage means to store the signal
charges from the electric charges generated by each of said photoelectric
converters of the set at a timing of each of different phases in synchronization
with the period of said modulation signal, and wherein

20 said charge ejector simultaneously outputs the signal charges stored with
respect to the different phases.

7. The spatial information detecting apparatus as set forth in claim 2, wherein said
25 charge storage means has a light shielding film on said second electrode formed
in the vicinity of a region of storing the signal charges.

8. The spatial information detecting apparatus as set forth in claim 1, wherein said

analyzer determines a phase difference between the light irradiated into the space and the light received by said photoelectric converter from the signal charges stored with respect to different phases of said modulation signal.

5

9. The spatial information detecting apparatus as set forth in claim 8, wherein said analyzer converts said phase difference into distance information.

10 10. The spatial information detecting apparatus as set forth in claim 1, wherein said analyzer determines distance information from the signal charges stored with respect to different phases in a period of said modulation signal, and wherein the spatial information detecting apparatus further comprises a phase switch for changing the phase of said modulation signal, at which the voltage is applied to
15 said first electrode, every time that storing the signal charges in said charge storage means at the phase is finished.

11. A spatial information detecting method using a CCD image sensor having an
20 overflow drain electrode comprising the steps of:
allowing said CCD image sensor to receive a light provided from a space, into which a light intensity-modulated by a predetermined modulation signal is being irradiated;
storing signal charges by repeating a charge extraction operation plural times with
25 respect to each of different phases in a period of said modulation signal; and
determining spatial information from the signal charges stored with respect to the different phases of said modulation signal,

wherein said charge extraction operation includes the steps of removing dispensable charges from electric charges generated by photoelectric converters

of said CCD image sensor according to a control voltage applied to said overflow electrode in synchronization with the period of said modulation signal, and storing the balance of the electric charges as the signal charges in a charge storage area of said CCD image sensor.

5

12. The spatial information detecting method as set forth in claim 11, wherein said CCD image sensor is an interline transfer CCD image sensor.

10

13. The spatial information detecting method as set forth in claim 11, wherein said CCD image sensor is a frame transfer CCD image sensor.

15

14. The spatial information detecting method as set forth in claim 13, wherein said CCD image sensor has at least three photoelectric converters, and said charge extraction operation includes the step of applying the control voltage to said overflow drain electrode in synchronization with the period of said modulation signal such that the electric charges generated by a predetermined one(s) of said at least three photoelectric converters are stored as the signal charges in said charge storage area, and the electric charges generated by the remaining photoelectric converter(s) are discarded as the dispensable charges.

20

25

15. The spatial information detecting method as set forth in claim 14, wherein the control voltage is applied to said overflow drain electrode to generate a potential barrier for electrically isolating the predetermined photoelectric converter(s) from the remaining photoelectric converter(s).

16. A light receiving element with controllable sensitivity comprising:
- at least one photoelectric converter for receiving a light provided from a space, into which a light intensity-modulated by a predetermined modulation signal is
- 5 being irradiated, and generating amounts of electric charges corresponding to an intensity of received light;
- charge discarding means having an electrode for removing dispensable charges from the electric charges generated by said photoelectric converter according to a voltage applied to said electrode;
- 10 charge storage means for storing signal charges from the electric charges generated by said photoelectric converter;
- a sensitivity controller for controlling the voltage applied to said electrode at a timing synchronized with a period of said modulation signal to change a ratio of the signal charges stored in said charge storage means to the electric charges
- 15 generated by said photoelectric converter; and;
- a charge ejector for outputting the signal charges from said charge storage means.

ABSTRACT

A spatial information detecting apparatus using an intensity-modulated light has a photoelectric converter for receiving a light provided from a space, into
5 which a light intensity-modulated by a predetermined modulation signal is being irradiated, and generating amounts of electric charges corresponding to an intensity of received light; charge discarding portion having an electrode for removing dispensable charges from the electric charges generated by the photoelectric converter according to a voltage applied to the electrode; charge
10 storage portion for storing signal charges from the electric charges generated by the photoelectric converter; control circuit for controlling the voltage applied to the electrode at a timing synchronized with a period of the modulation signal to change a ratio of the signal charges stored in the charge storage portion to the electric charges generated by the photoelectric converter; charge ejector for
15 outputting the signal charges from the charge storage portion; and an analyzer for determining spatial information from an output of the charge ejector. According to this apparatus, since the dispensable charges are previously removed from the electric charges generated by the photoelectric converter by the charge discarding portion, it is possible to improve S/N ratio and accurately determine the
20 spatial information.

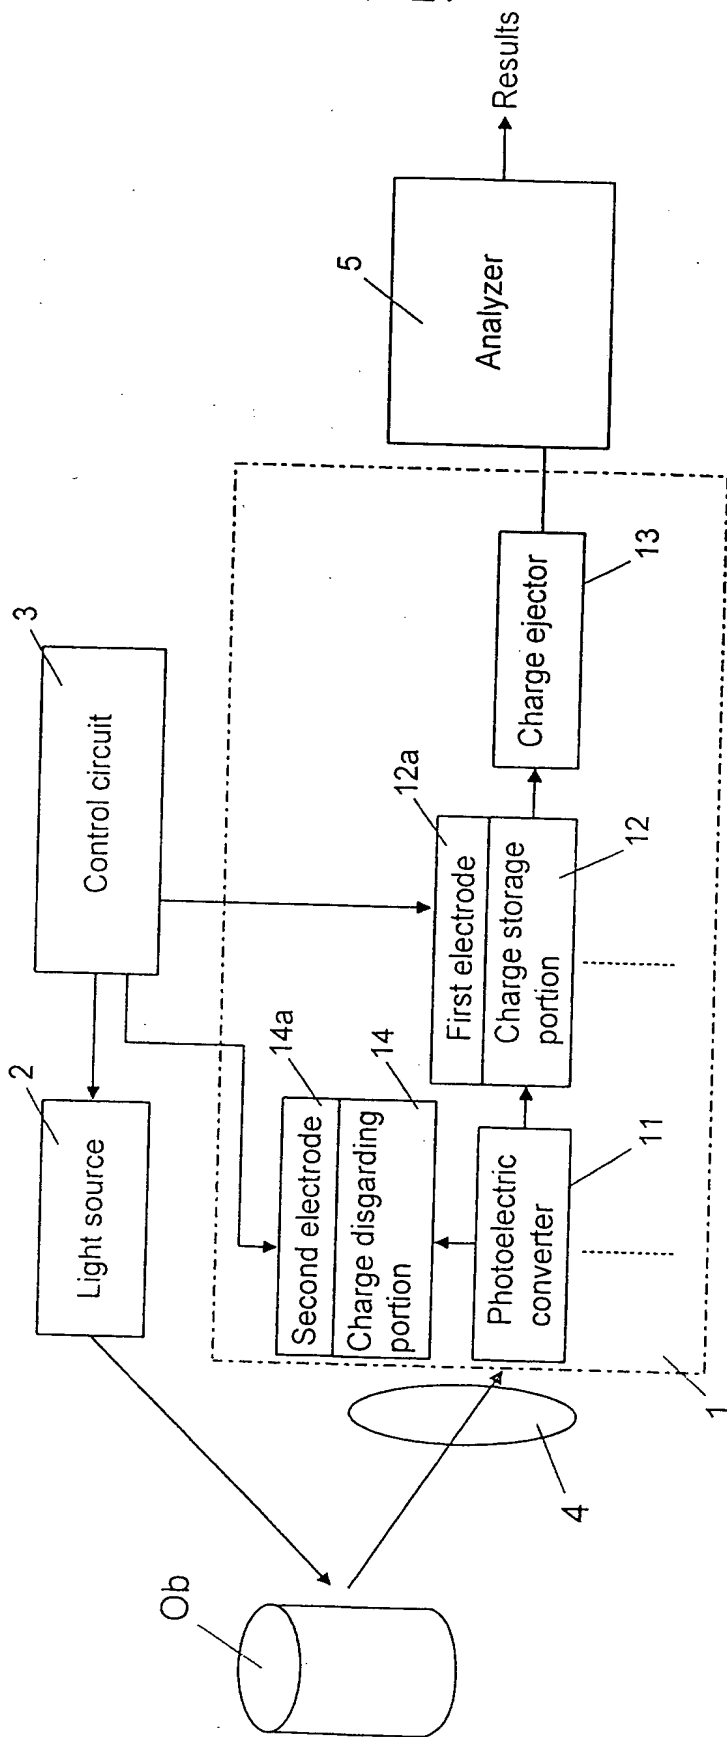


FIG. 1

2 / 27

FIG. 2A

Modulation signal

FIG. 2B

voltage
On
Off

FIG. 2C

voltage
On
Off

FIG. 2D

signal charges
Yes
No0 90 180 270 360(0) 90
Phase (degree)

FIG. 3A

Modulation signal

FIG. 3B

voltage
On
Off

FIG. 3C

voltage
On
Off

FIG. 3D

signal charges
Yes
No0 90 180 270 360(0) 90
Phase (degree)

3 / 2 7

FIG. 4A

Modulation signal

FIG. 4B

voltage
On
Off

FIG. 4C

voltage
On
Off

FIG. 4D

signal charges
Yes
No

0 90 180 270 360(0) 90
Phase (degree)

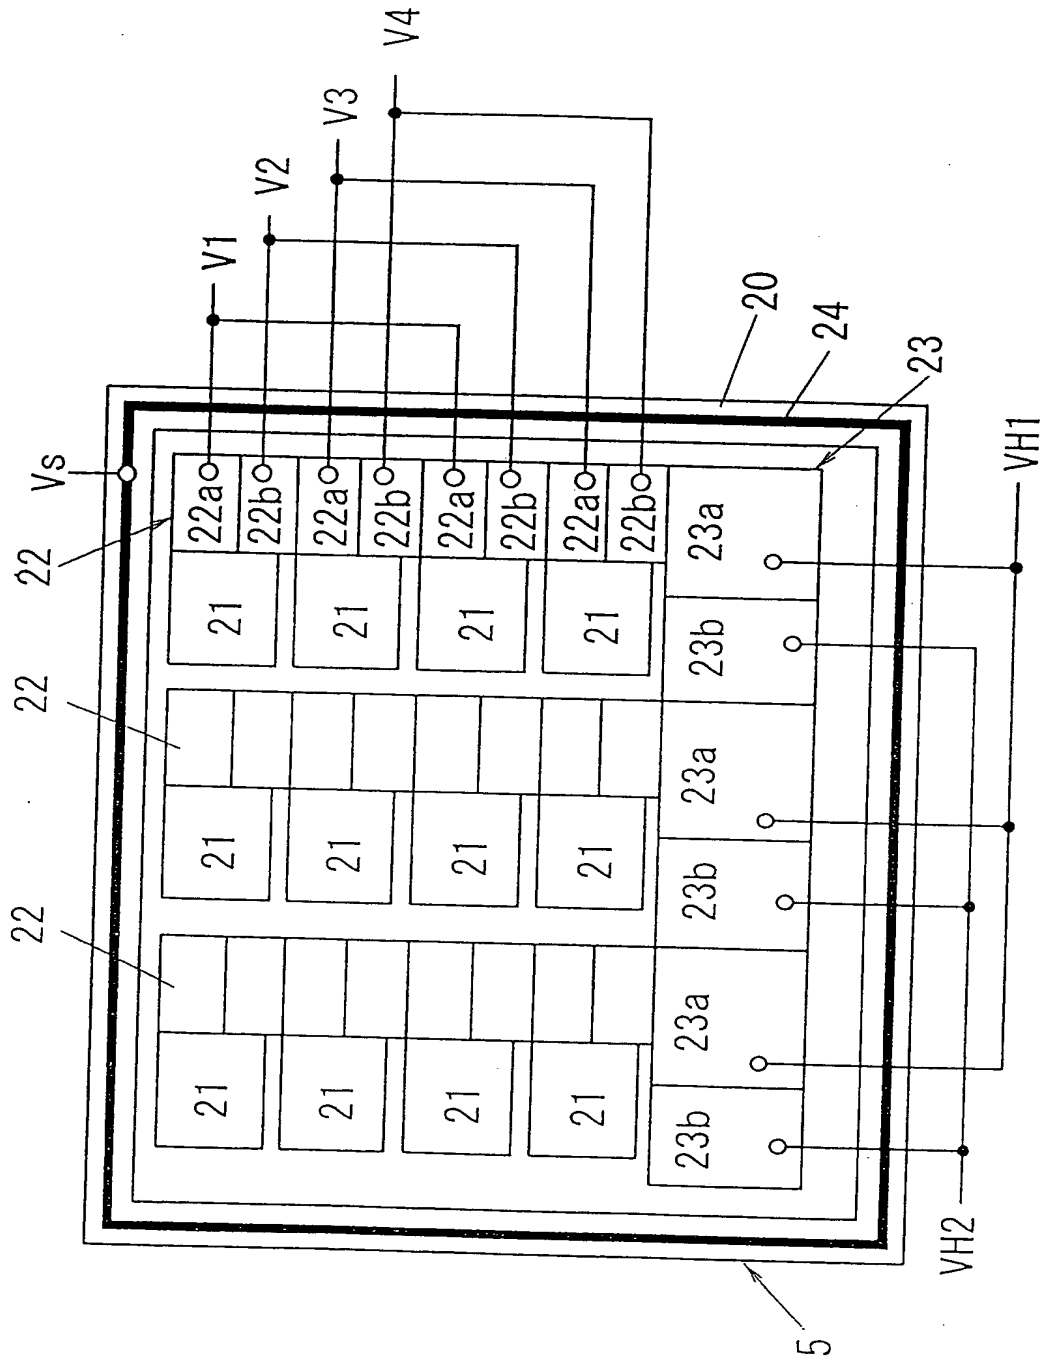


FIG. 5

5/27

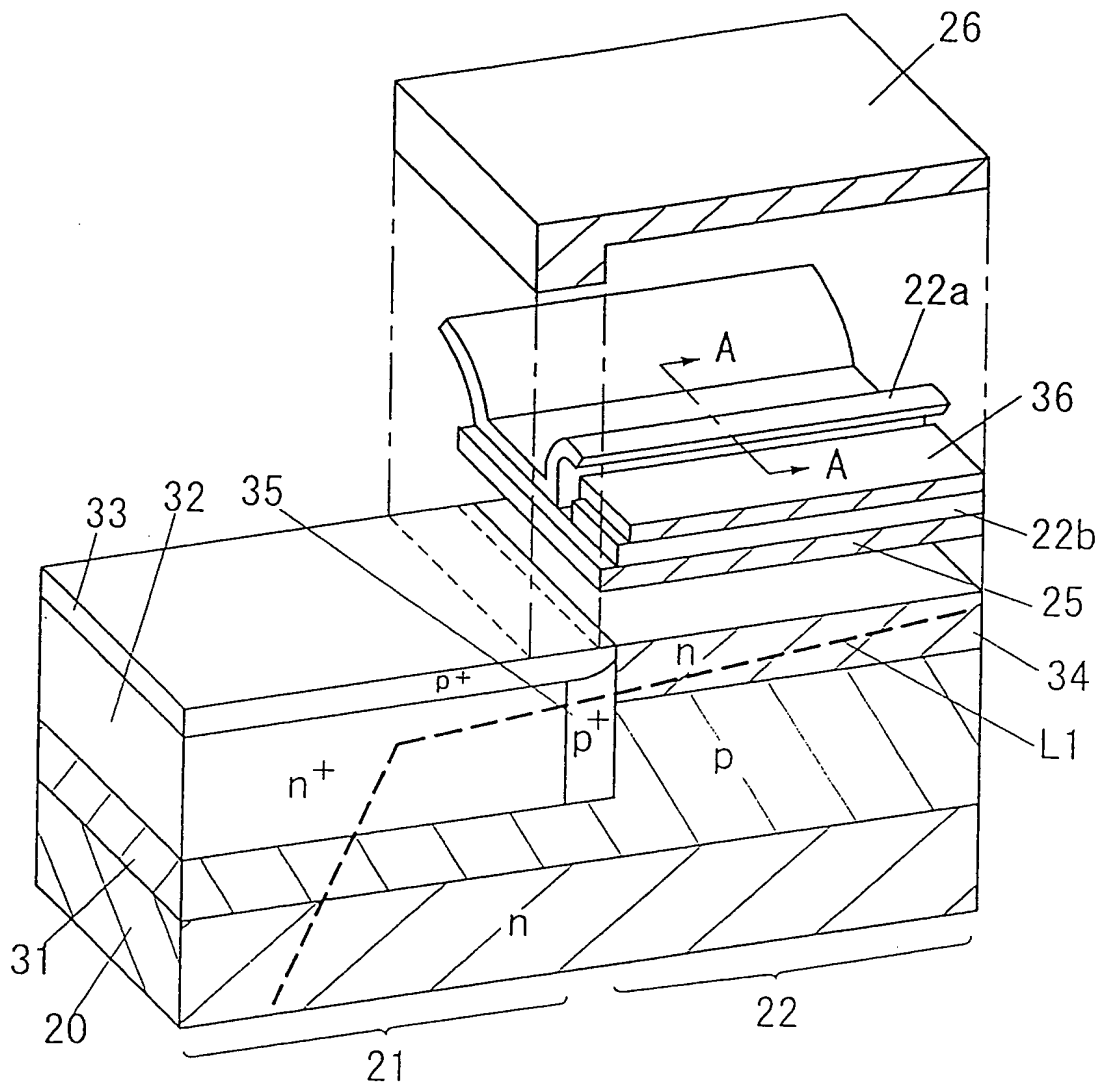


FIG. 6

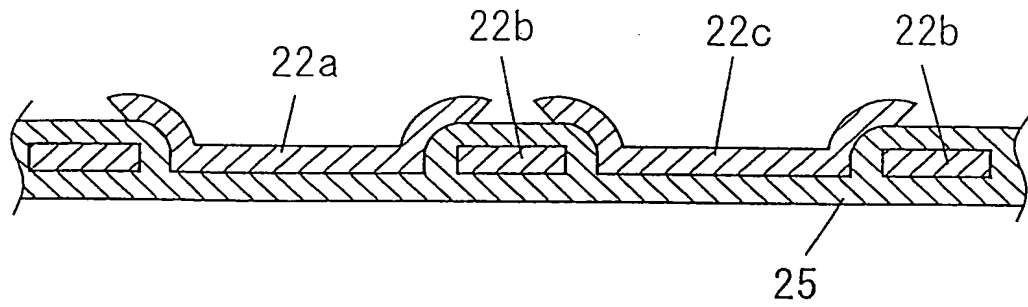


FIG. 7

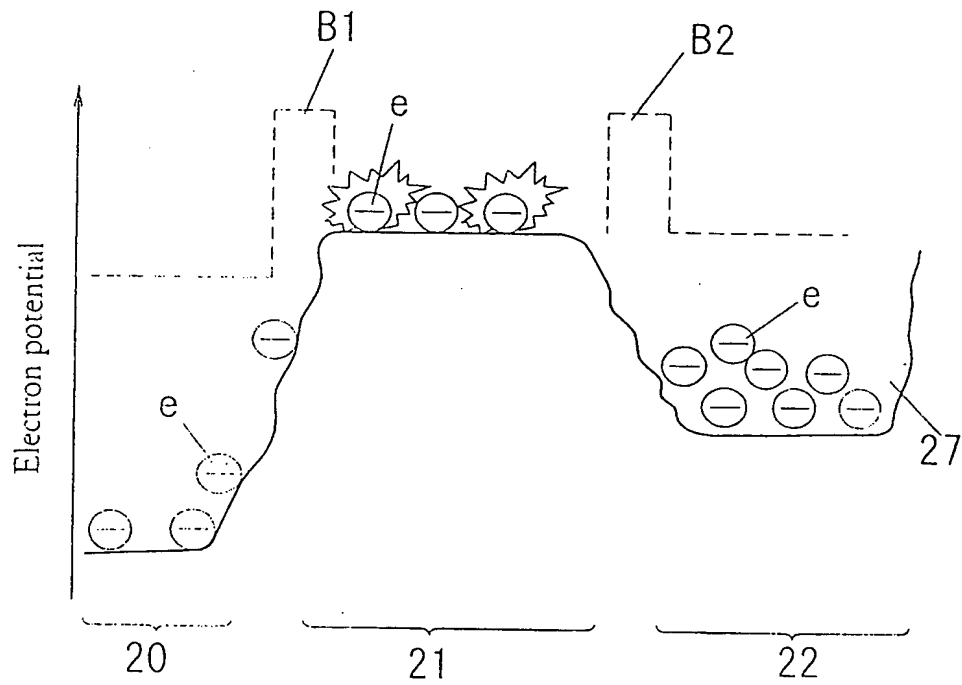


FIG. 8

7 / 27

FIG. 9A

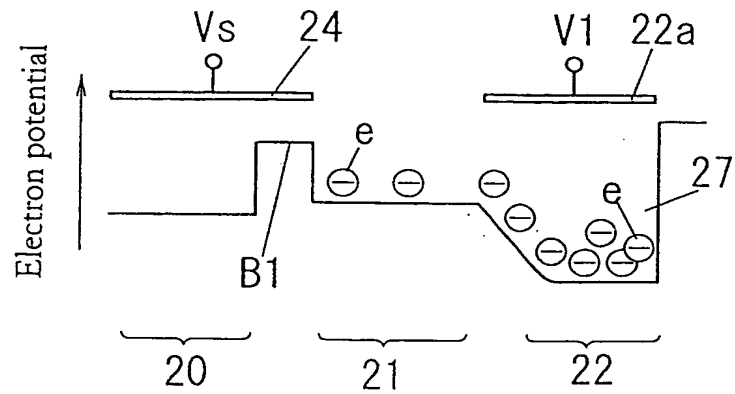


FIG. 9B

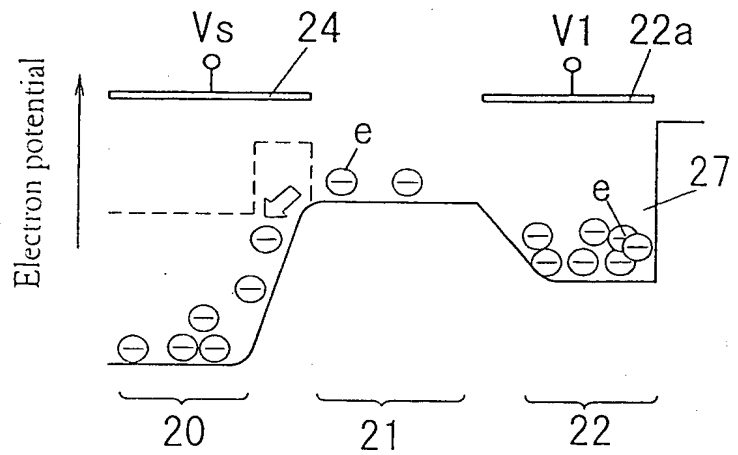
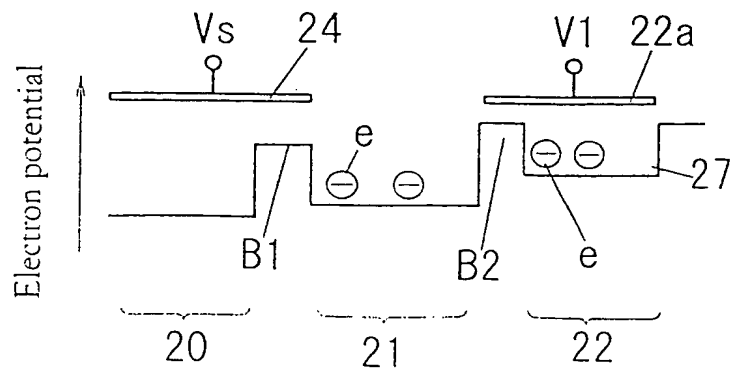


FIG. 9C



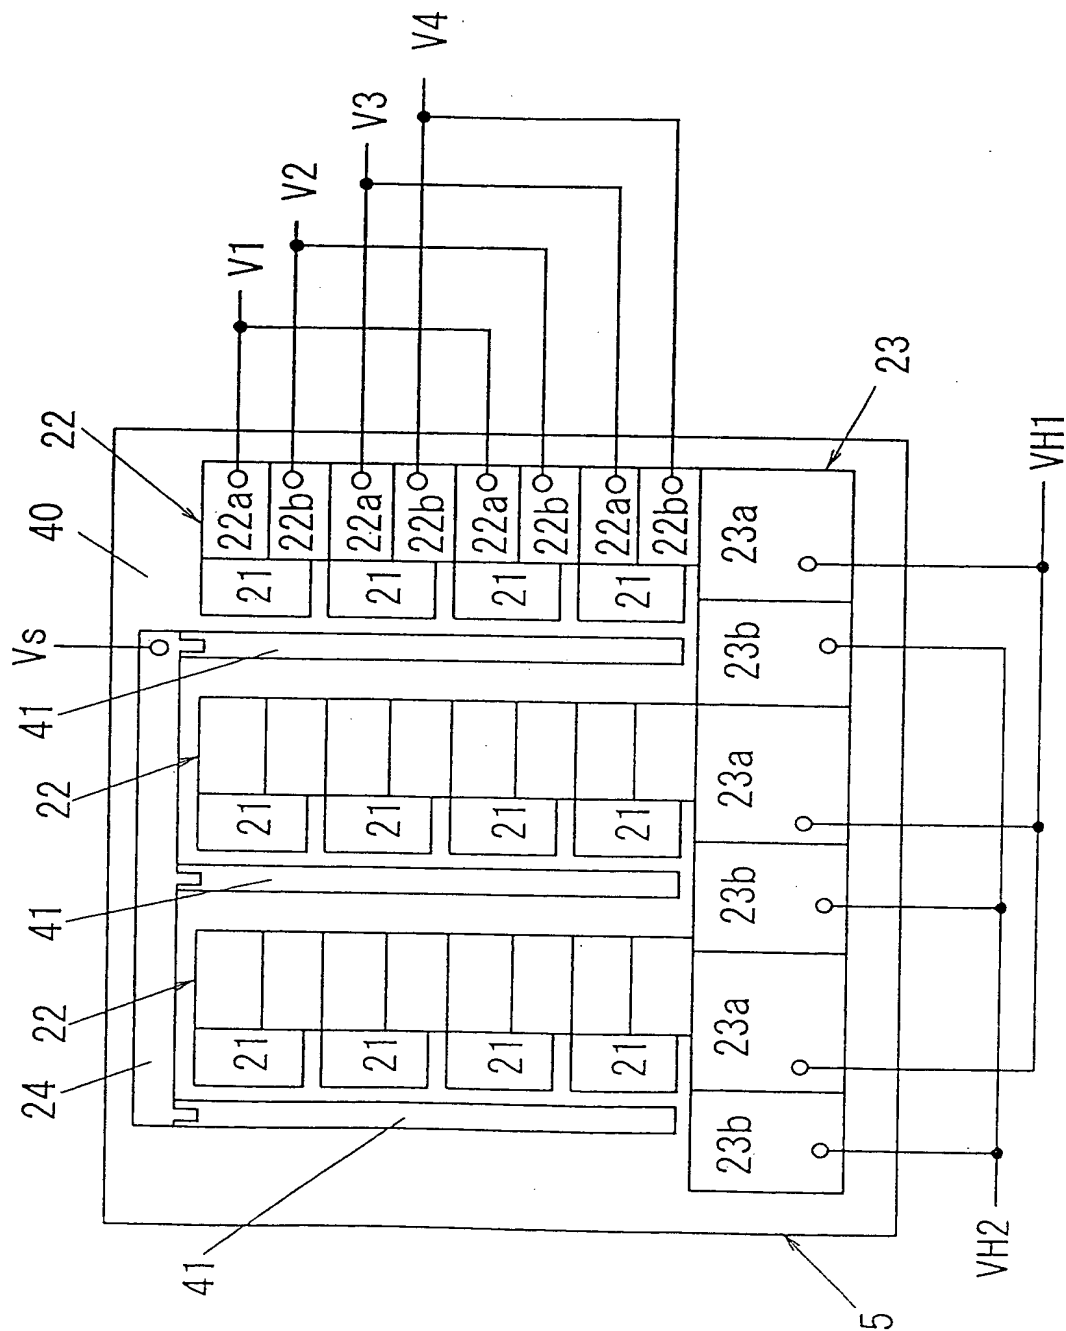


FIG. 10

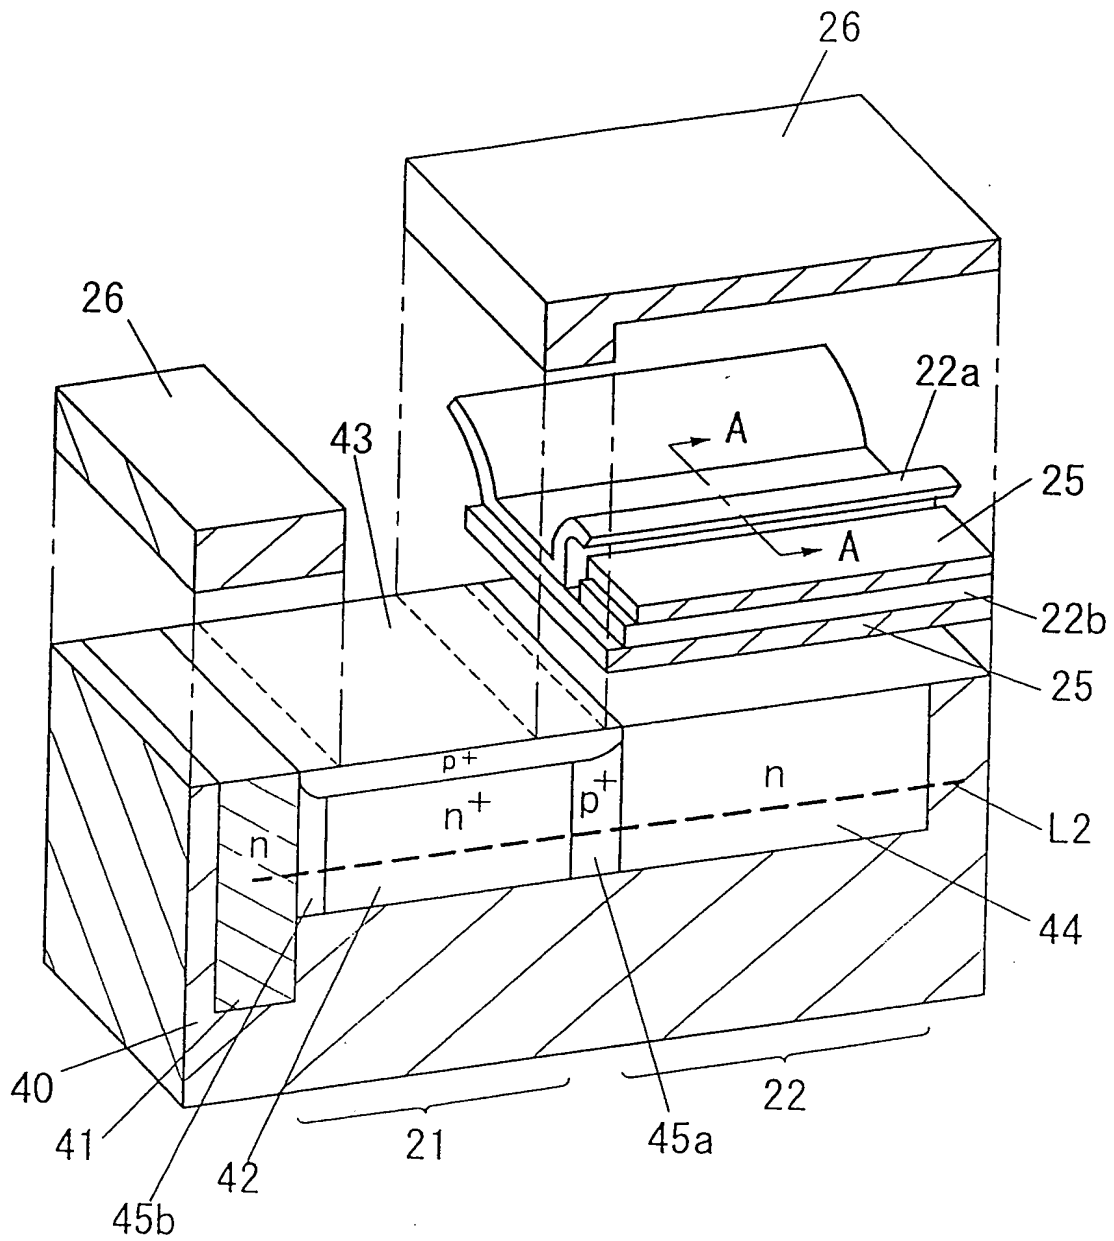


FIG. 11

10/27

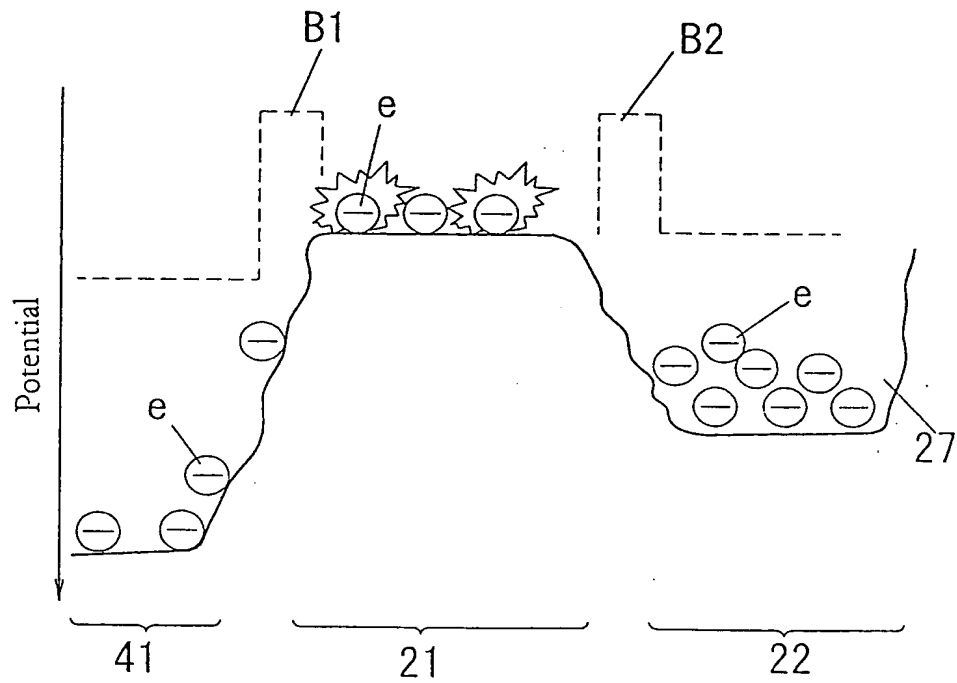


FIG. 12

FIG. 13A

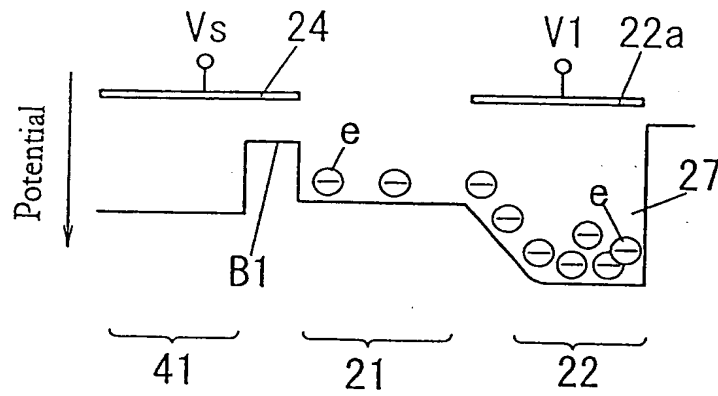


FIG. 13B


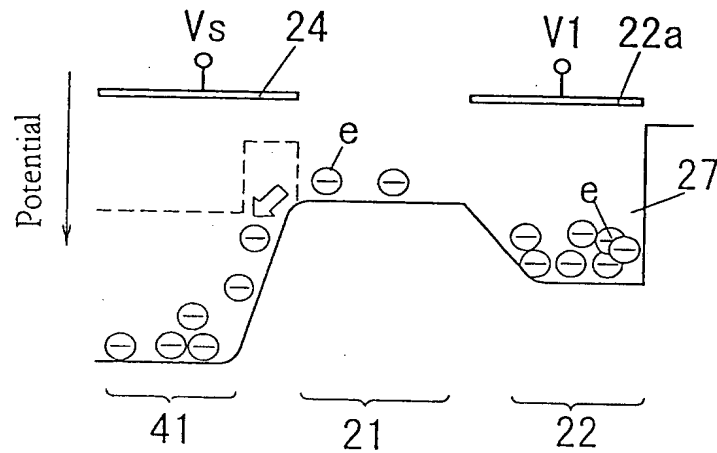


FIG. 13C

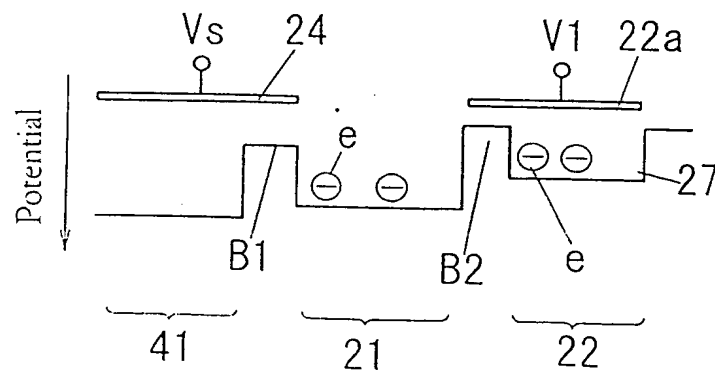

1 2 / 2 7

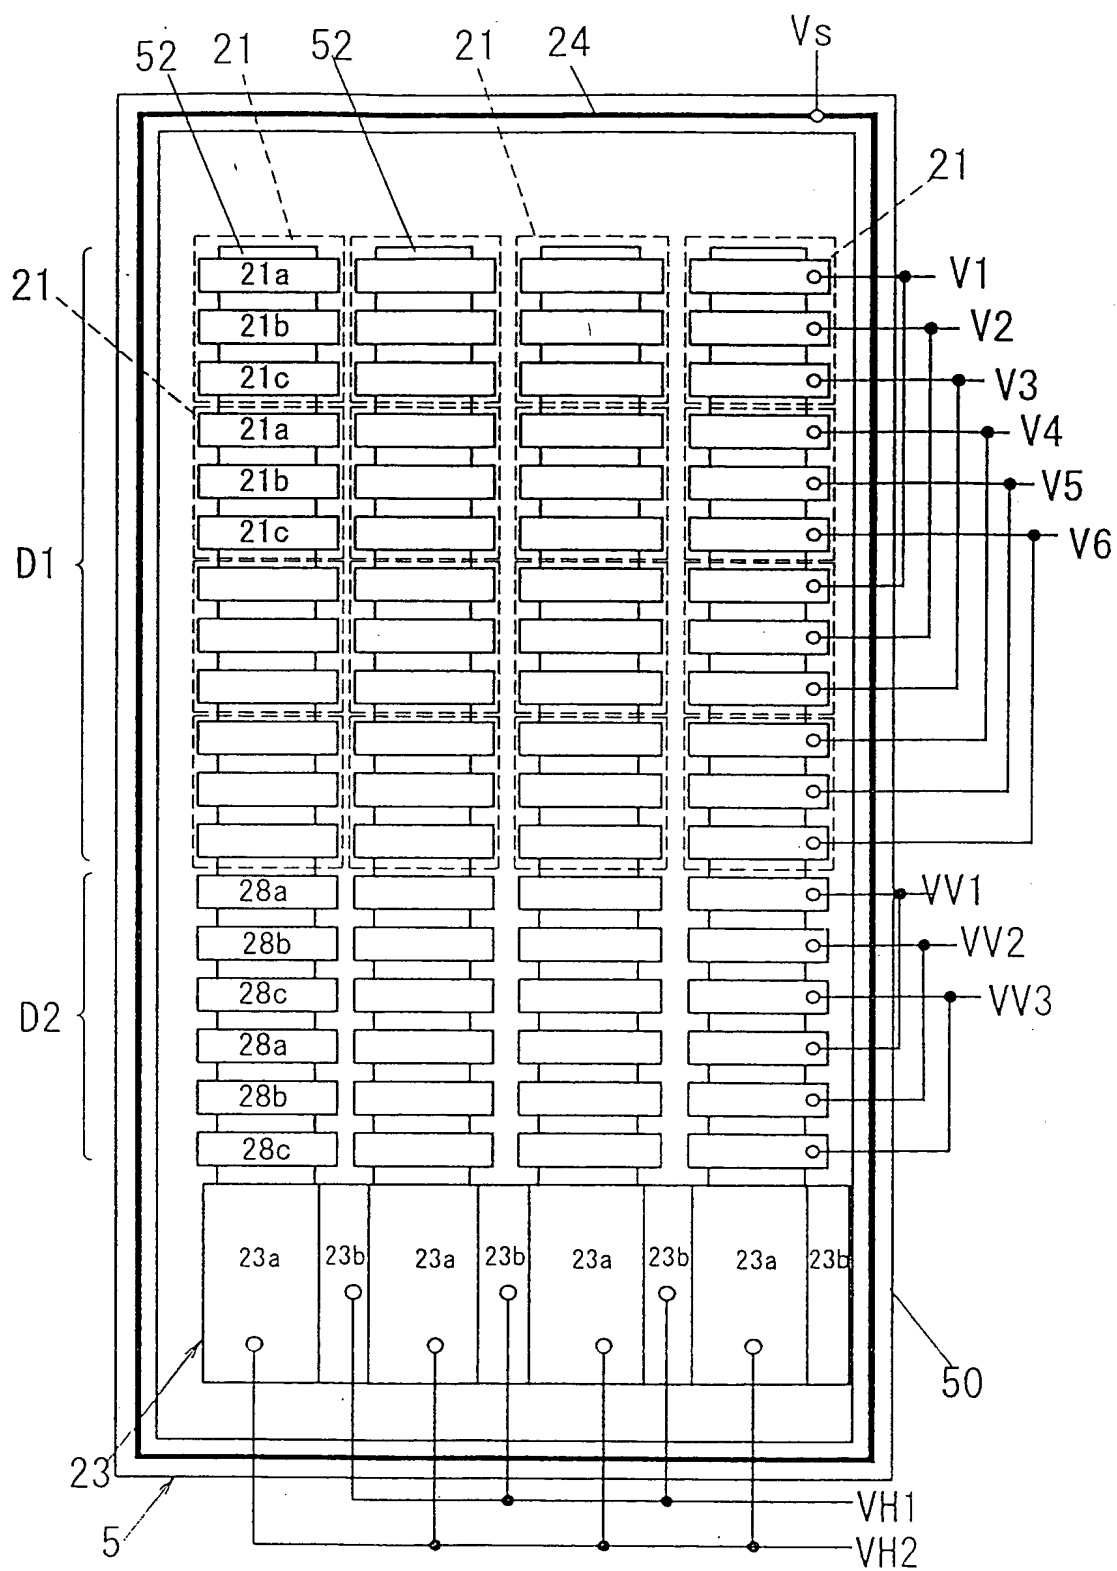


FIG. 14

13/27

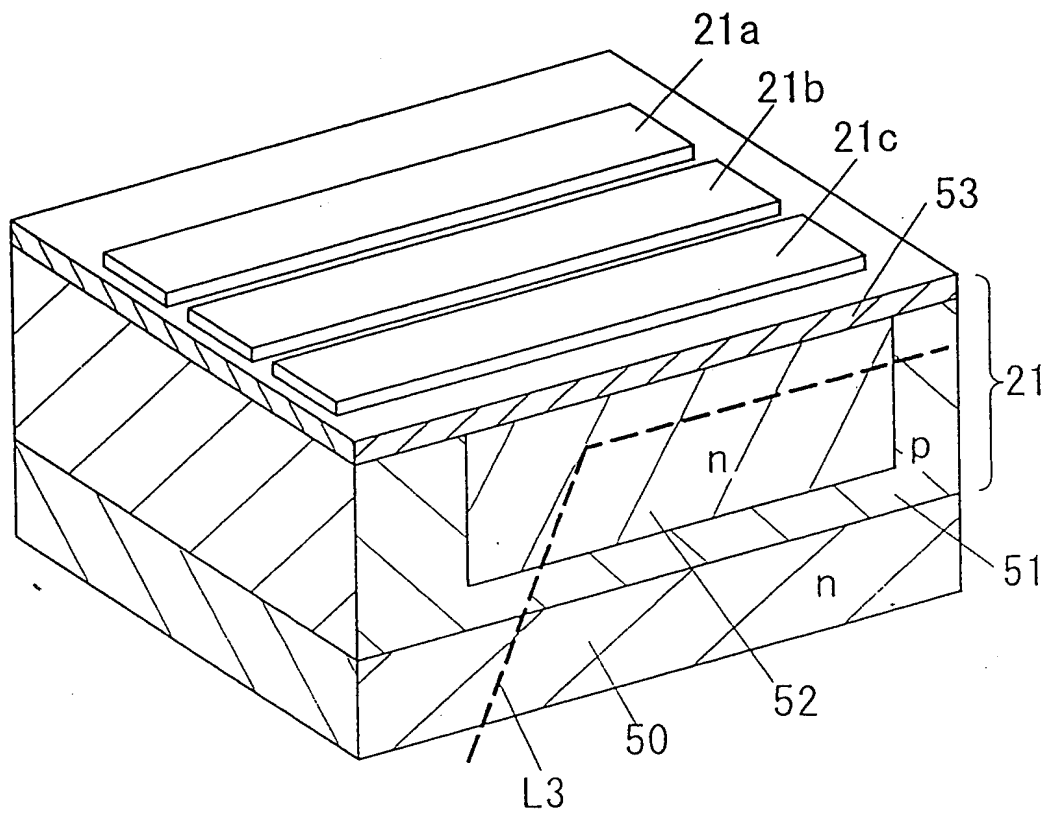


FIG. 15

14/27

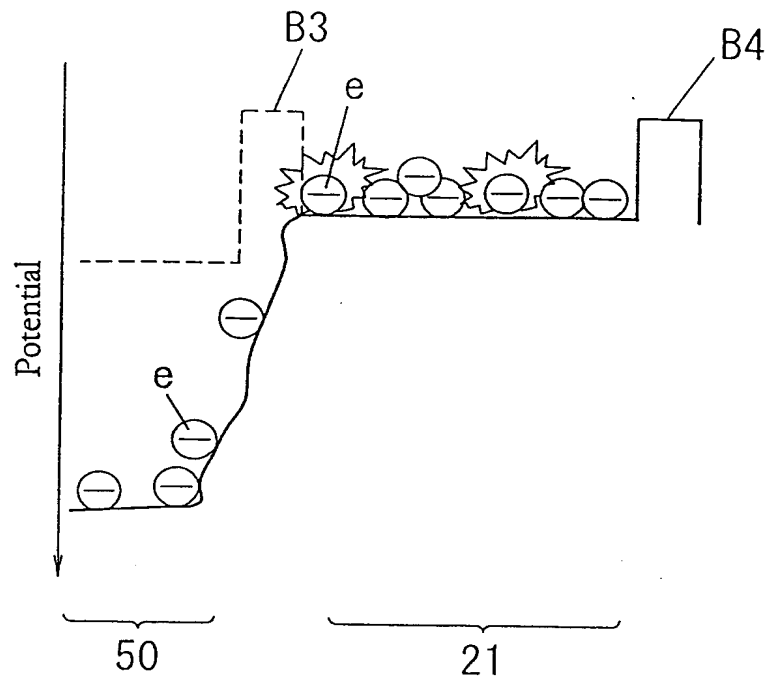


FIG. 16

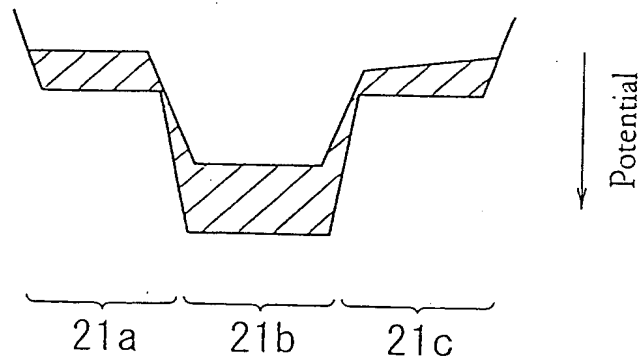


FIG. 17

15/27

FIG. 18A

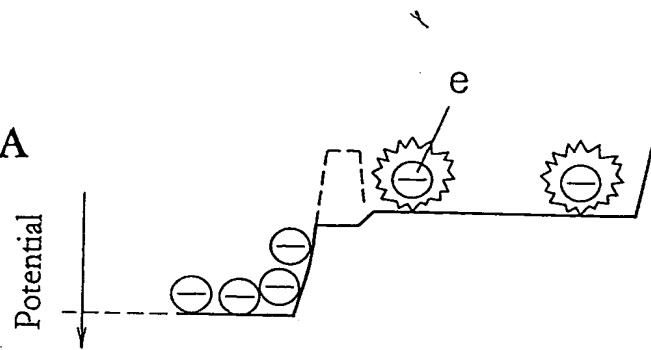


FIG. 18B

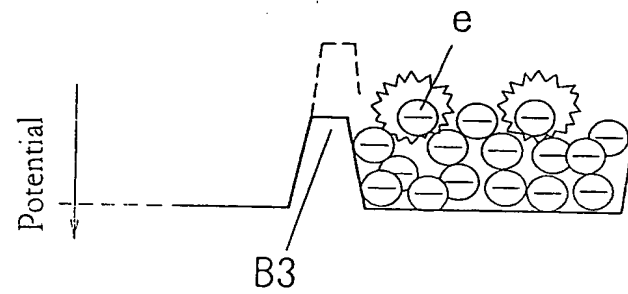
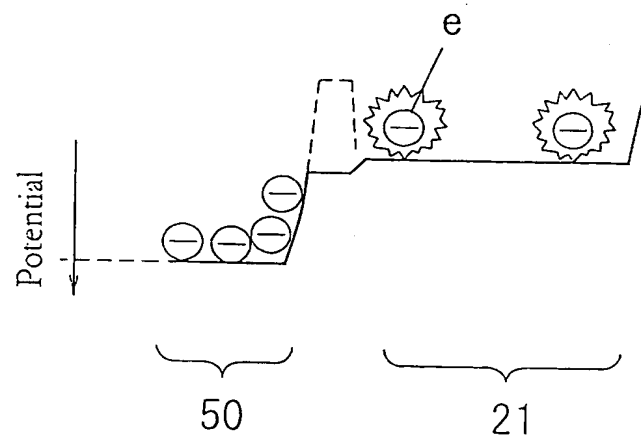


FIG. 18C



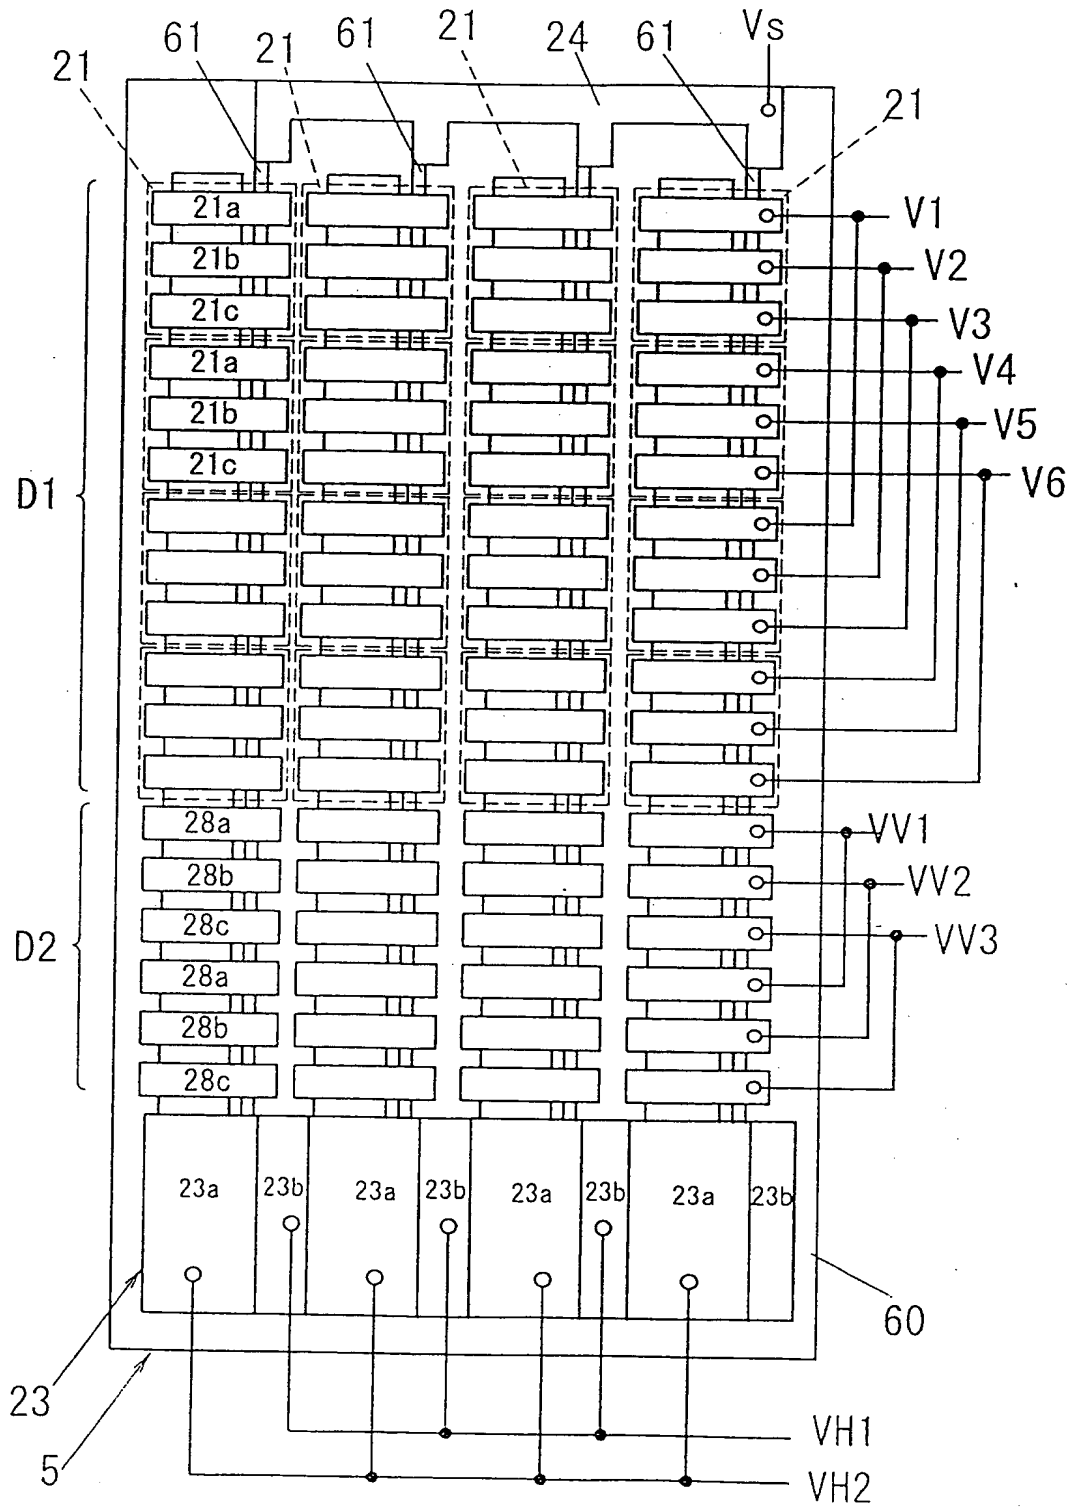


FIG. 19

17/27

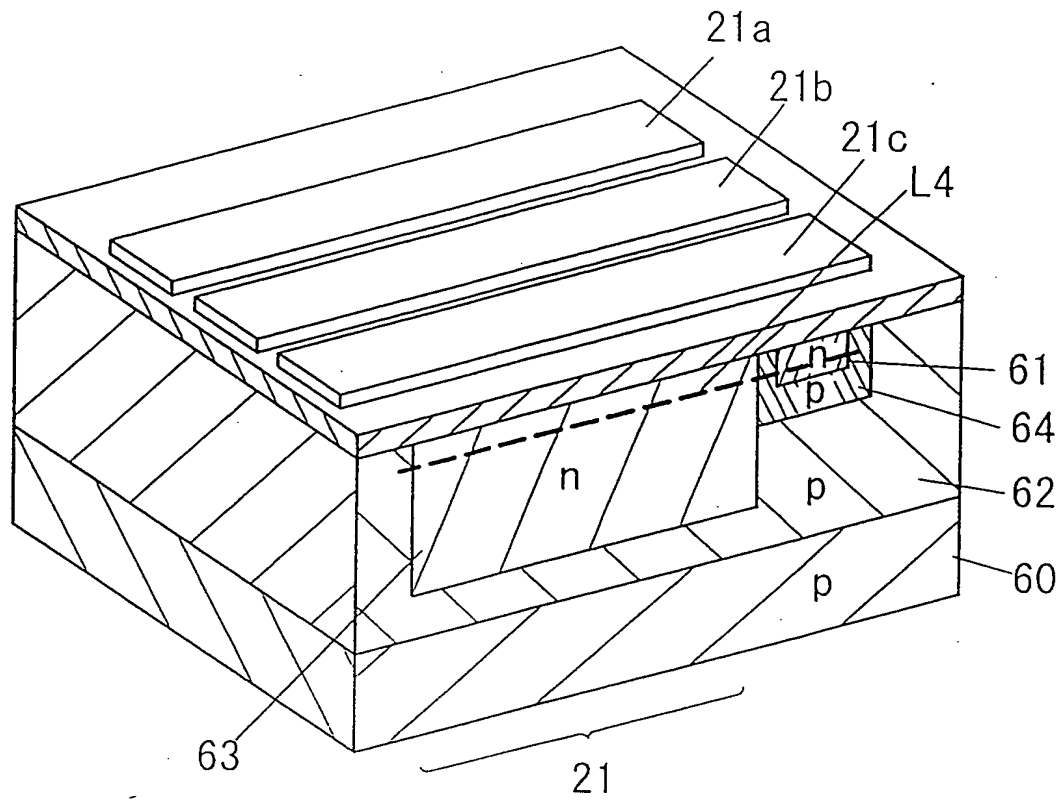


FIG. 20

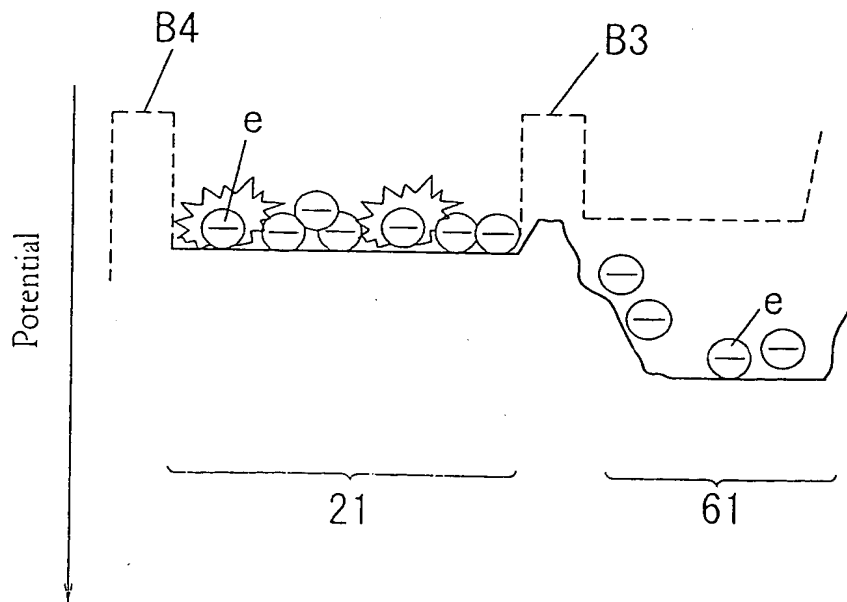


FIG. 21

18 / 27

FIG. 22A

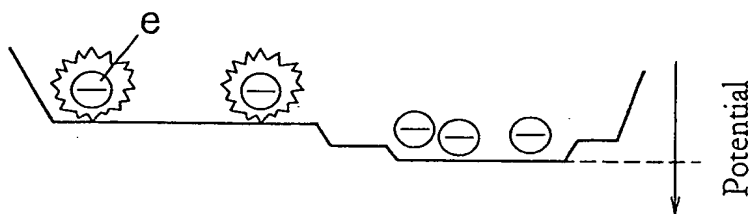


FIG. 22B


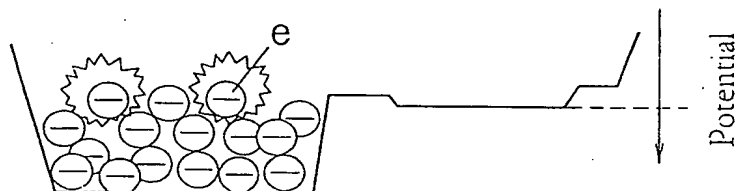


FIG. 22C

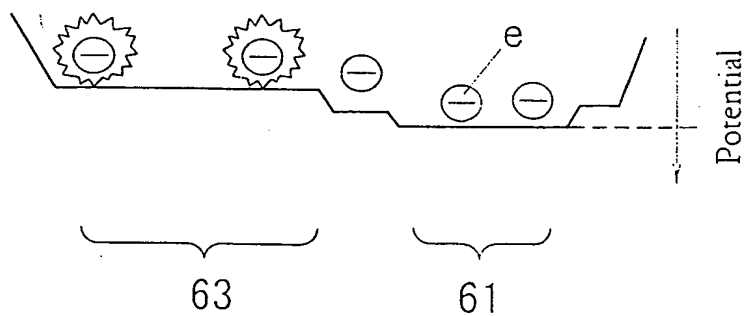

19/27

FIG. 23A


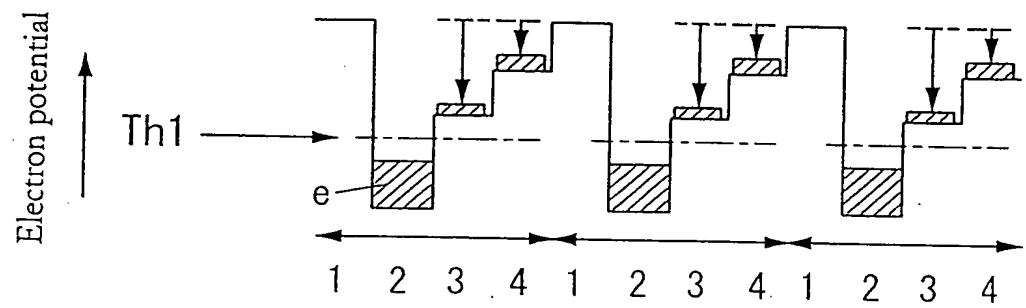


FIG. 23B

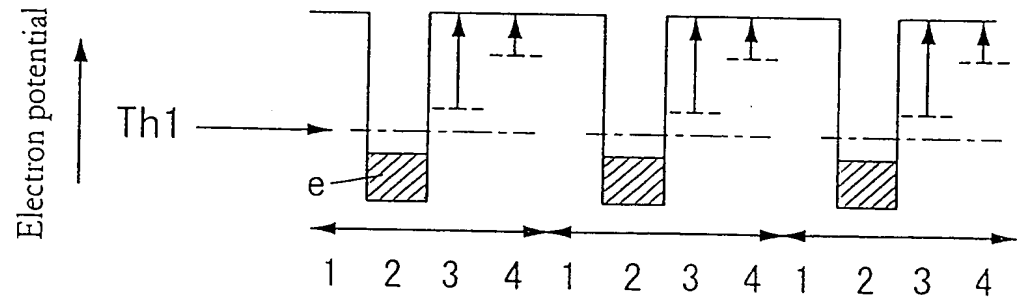

20/27

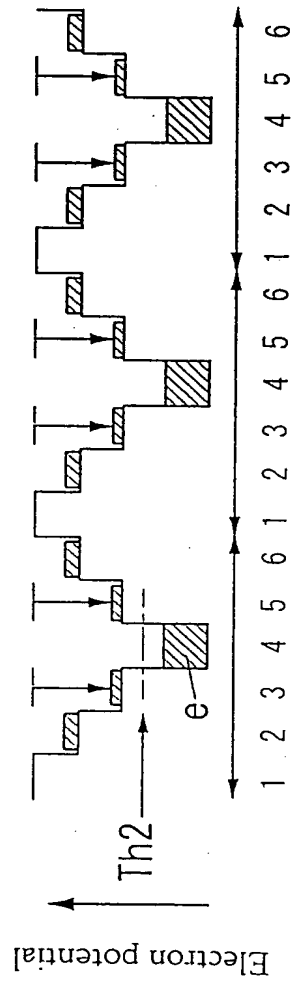


FIG. 24A

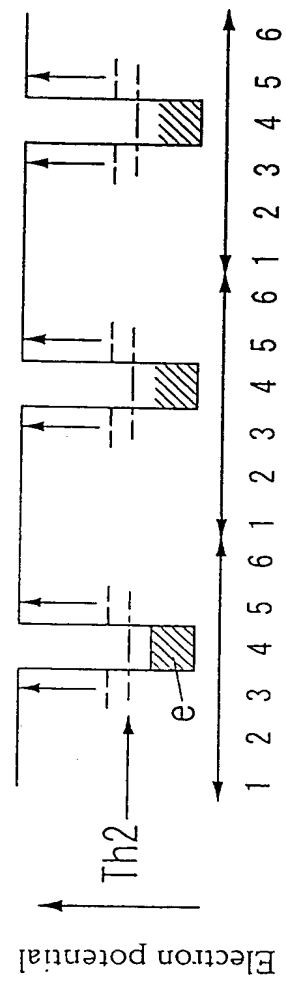


FIG. 24B

21 / 27

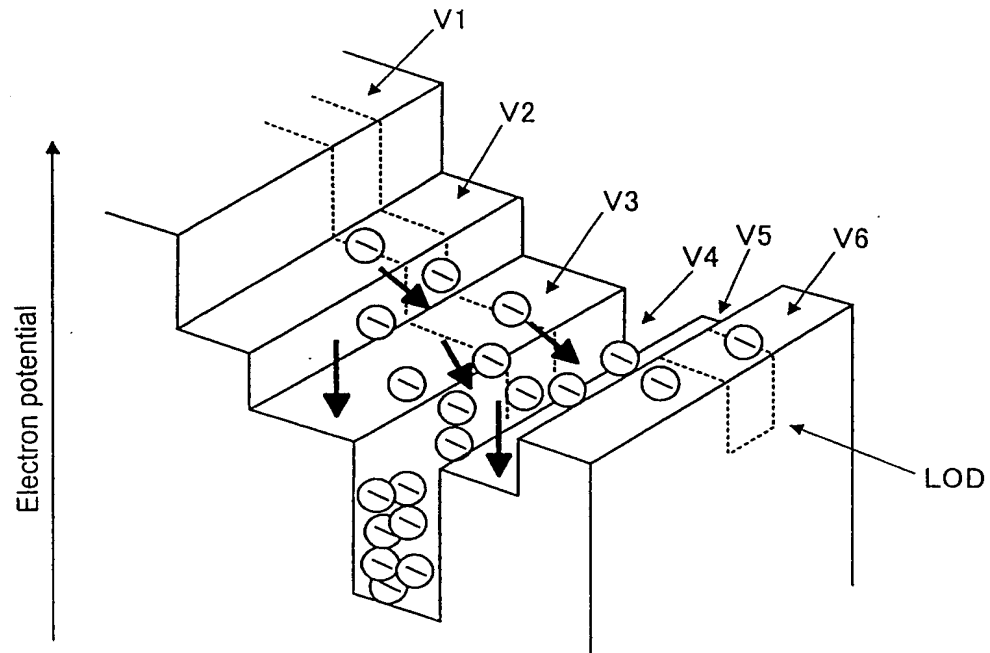


FIG. 25A

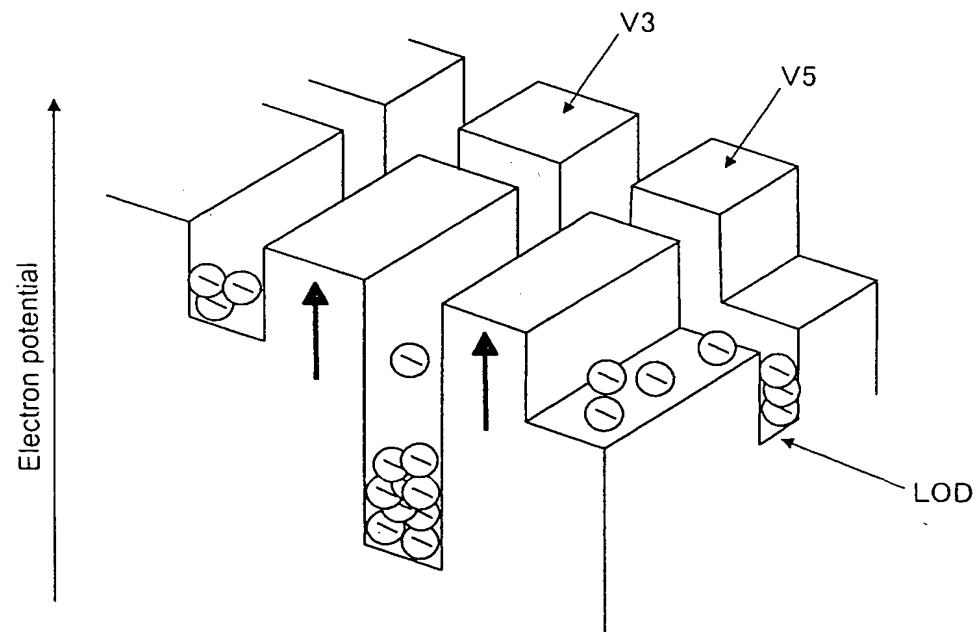


FIG. 25B

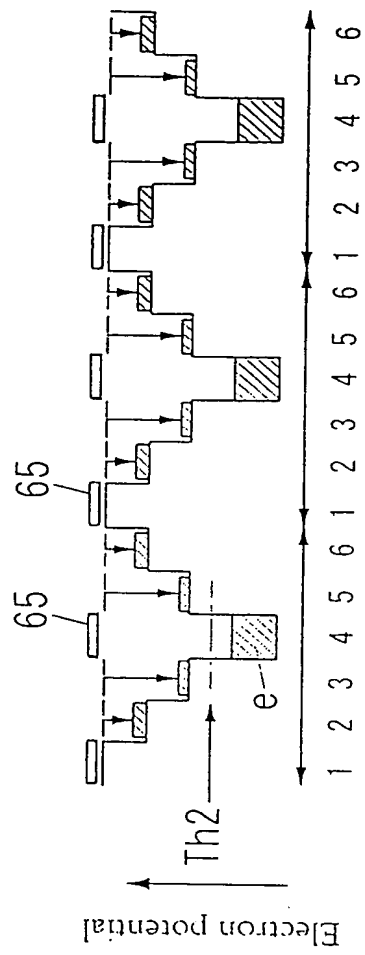


FIG. 26A

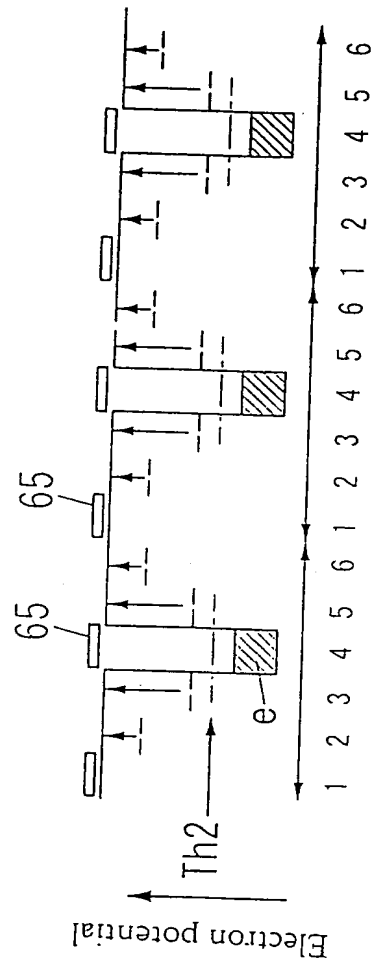


FIG. 26B

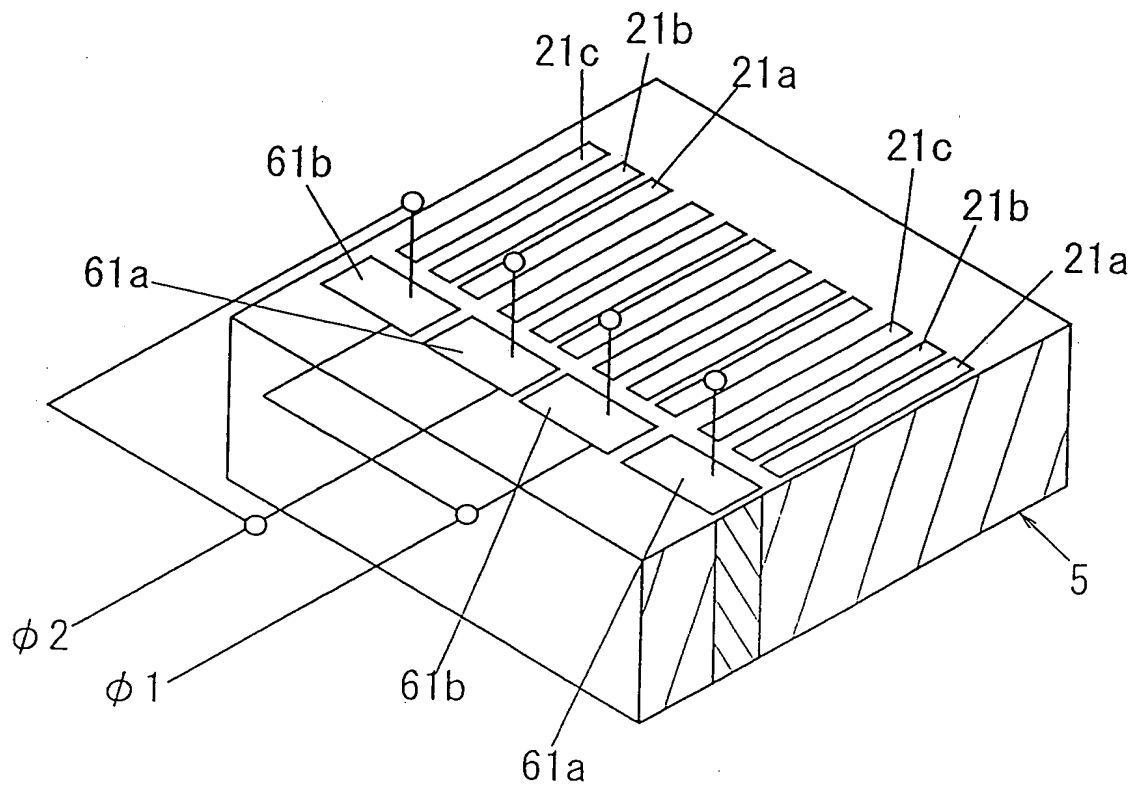


FIG. 27

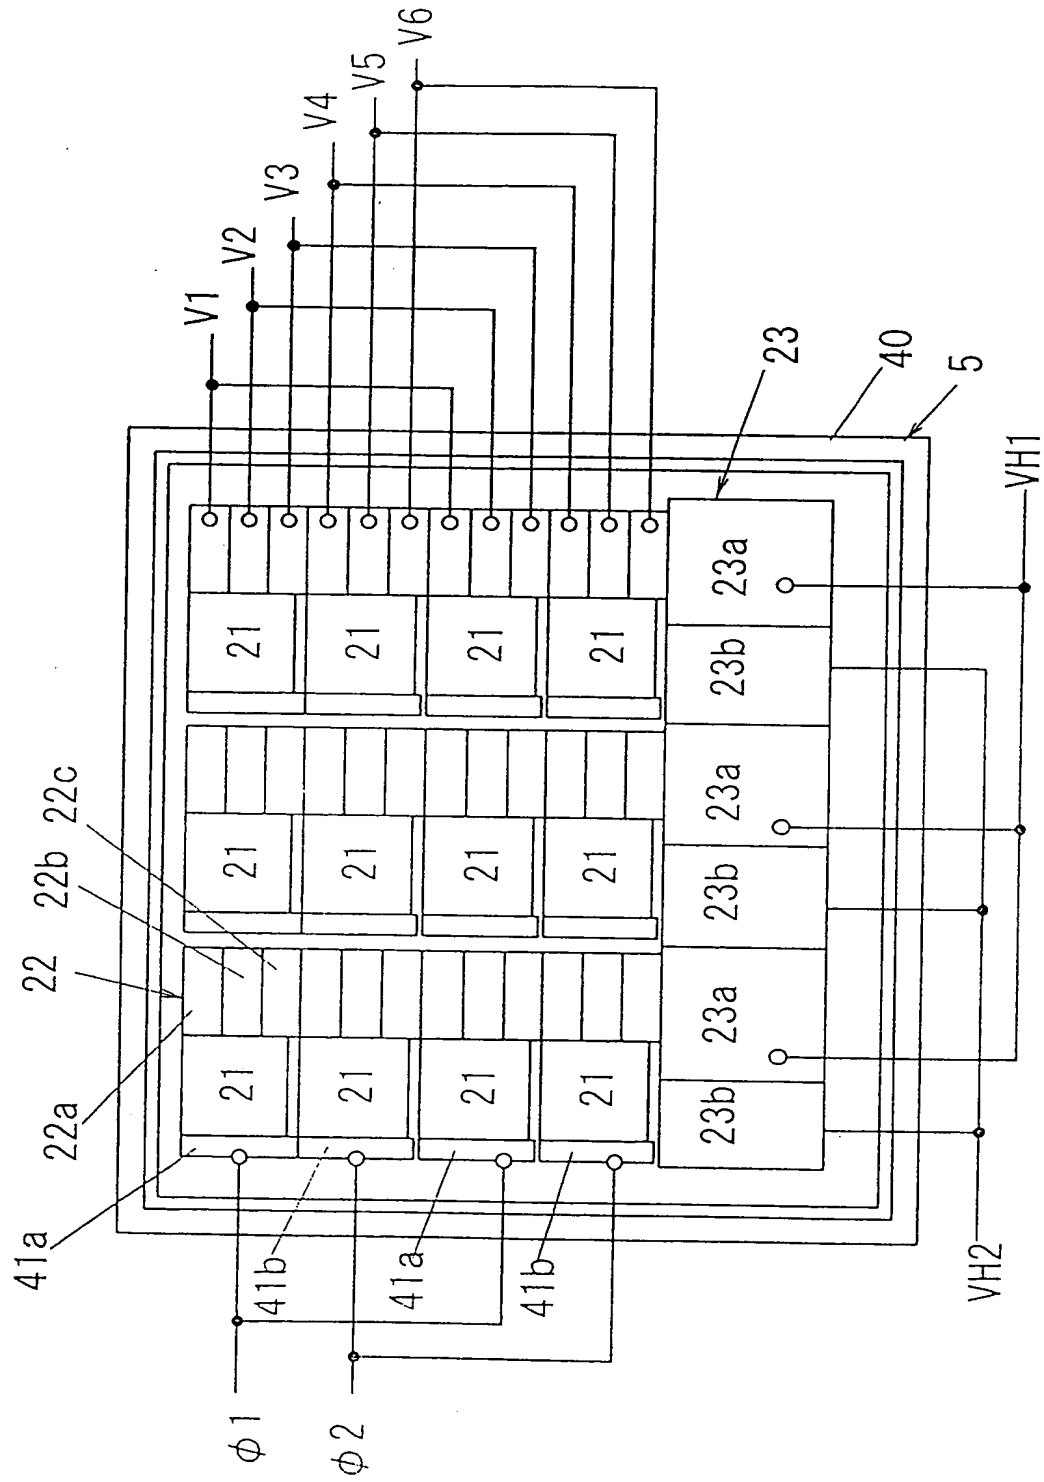


FIG. 28

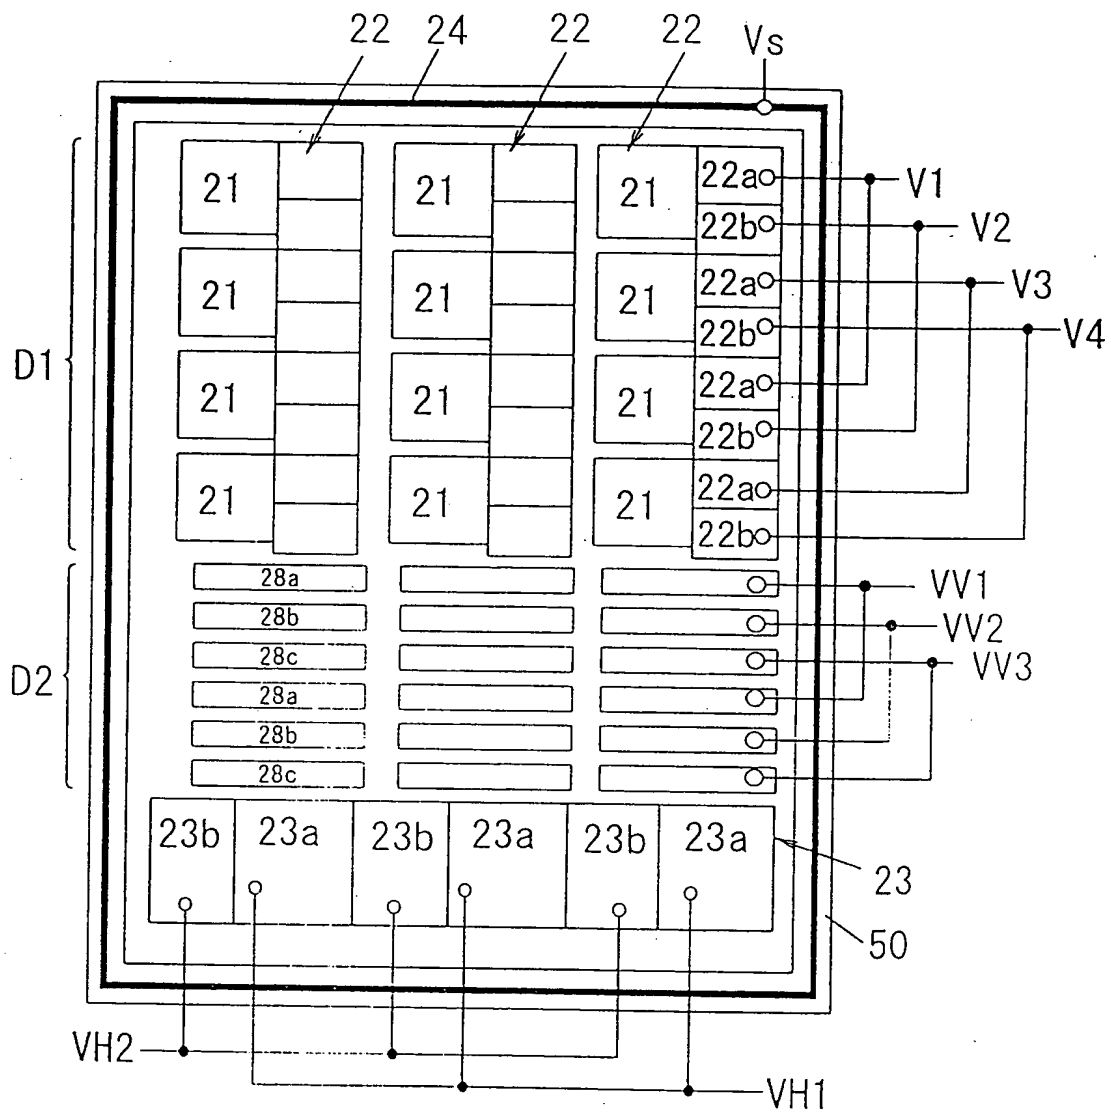


FIG. 29

26 / 27

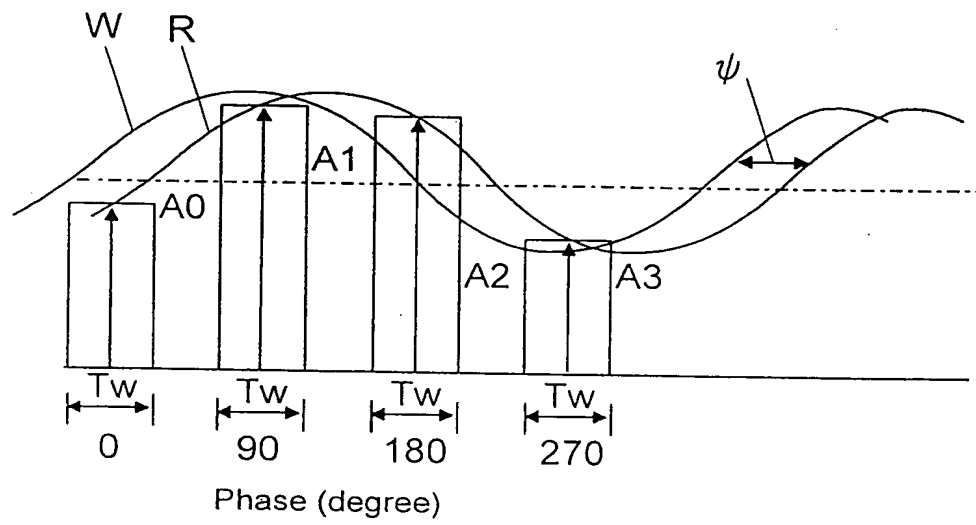


FIG. 30

27/27

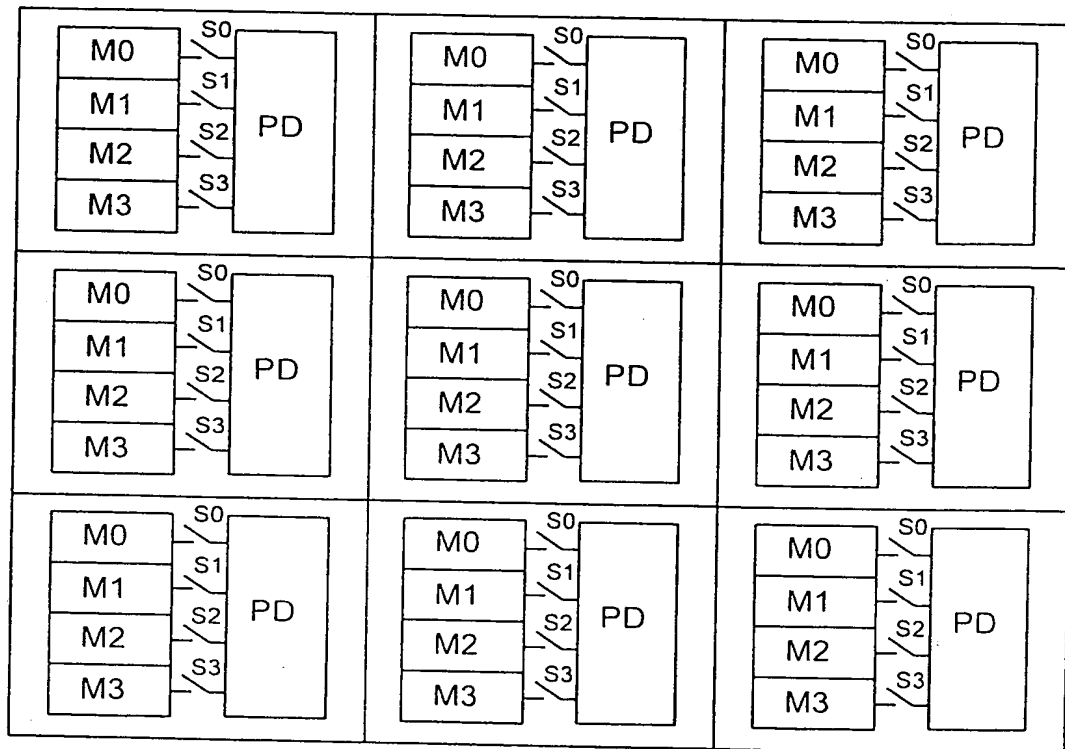


FIG. 31

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.